

# TC13016

Bi-telecentric lens for 1/3" detectors, magnification 0.290 ×, C-mount

## SPECIFICATIONS

Magnification	(×)	0.290
Image circle Ø	(mm)	6.0

### Object field of view(8)

with 1/3" detector (4.8 x 3.6 mm)	(mm × mm)	16.55 x 12.41
with 1/2.5" detector (5.70 x 4.28 mm)	(mm × mm)	Ø = 14.8
with 1/2" detector (6.4 x 4.8 mm)	(mm × mm)	Ø = 16.6
with 1/1.8" detector (7.13 x 5.37 mm) (7)	(mm × mm)	Ø = 18.4
with 2/3" - 5 MP detector (8.45 x 7.07 mm)	(mm × mm)	Ø = 20.7

### Optical specifications

Working distance (1)	(mm)	43.1
wF/# (2)		8
Telecentricity typical (max) (3)	(deg)	< 0.08 (0.10)
Distortion typical (max) (4)	(%)	< 0.04 (0.08)
Field depth (5)	(mm)	8
CTF @ 70 lp/mm	(%)	> 40

### Dimensions

Mount		C
Phase Adjustment (9)		
Length (6)	(mm)	80.9
Diameter	(mm)	37.7
Mass	(g)	-

## NOTES

1. Working distance: distance between the front end of the mechanics and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
2. Working F-number (higher wF/#): the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
3. Maximum slope of chief rays inside the lens: when converted to millirad, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
4. Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
5. At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 5.5 µm.
6. Measured from the front end of the mechanics to the camera flange.
7. With 1/1.8" (8.9 mm diagonal) detectors, the FOV of TC12yyy lenses may show some vignetting at the image corners, as these lenses are optimized for 1/2" detectors (8 mm diagonal).
8. For the fields with the indication "Ø =", the image of a circular object of such diameter is fully inscribed into the detector.
9. Indicates the availability of an integrated camera phase adjustment feature. If missing, it can be supplied upon request (except for TC23004, TC23007, TC23009, TC23012).


## COMPATIBLE PRODUCTS

Despite the efforts made to generate an error-free compatibility list, we always recommend to consult the Opto Engineering® technical support department before purchasing a compatible product. Opto Engineering® shall not be liable for any damage or malfunctioning caused by the incorrect selection of a compatible product.



LTCLHP series

High-performance telecentric illuminators

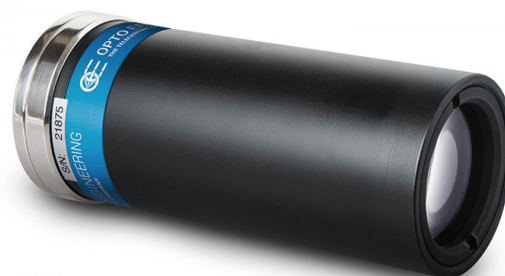

LTCLHP016-G	Telecentric HP illuminator, beam diameter 20 mm, green
LTCLHP016-B	Telecentric HP illuminator, beam diameter 20 mm, blue
LTCLHP016-W	Telecentric HP illuminator, beam diameter 20 mm, white



LTLADC series

Continuous LED low angle direct ringlights

LTZZO130-75-3-W-24V	LED low angle ringlight, 3 LED rows, outer diameter 131 mm, 75°, white, 24V
LTZZO130-75-3-R-24V	LED low angle ringlight, 3 LED rows, outer diameter 131 mm, 75°, red, 24V
LTZZO130-75-3-G-24V	LED low angle ringlight, 3 LED rows, outer diameter 131 mm, 75°, green, 24V
LTZZO130-75-3-B-24V	LED low angle ringlight, 3 LED rows, outer diameter 131 mm, 75°, blue, 24V



LTRNST series

LED ring illuminators - straight type

LTRN016RD	Ring LED illuminator, inner diameter 37 mm, straight type, red 630 nm
LTRN016GR	Ring LED illuminator, inner diameter 37 mm, straight type, green 525 nm
LTRN016BL	Ring LED illuminator, inner diameter 37 mm, straight type, blue 470 nm
LTRN016NW	Ring LED illuminator, inner diameter 37 mm, straight type, white



LTRNDC series

Continuous LED direct ringlights

LTZGK050-15-2-W-24V	LED ringlight, 2 LED rows, outer diameter 50 mm, 15°, white, 24V
LTZGK050-15-2-R-24V	LED ringlight, 2 LED rows, outer diameter 50 mm, 15°, red, 24V
LTZGK050-15-2-G-24V	LED ringlight, 2 LED rows, outer diameter 50 mm, 15°, green, 24V
LTZGK050-15-2-B-24V	LED ringlight, 2 LED rows, outer diameter 50 mm, 15°, blue, 24V
LTZGK070-45-3-W-24V	LED ringlight, 3 LED rows, outer diameter 70 mm, 45°, white, 24V
LTZGK070-45-3-R-24V	LED ringlight, 3 LED rows, outer diameter 70 mm, 45°, red, 24V
LTZGK070-45-3-G-24V	LED ringlight, 3 LED rows, outer diameter 70 mm, 45°, green, 24V
LTZGK070-45-3-B-24V	LED ringlight, 3 LED rows, outer diameter 70 mm, 45°, blue, 24V



LTBC series

Continuous LED backlight

LTBC054054-W	Continuous LED backlight, 54x54 illumination area, white
LTBC054054-G	Continuous LED backlight, 54x54 illumination area, green



LTBFC series

Continuous flat side-emitting LED backlights

LTPVRG25X36-00-1-W-24V	Flat side-emitting LED backlight, thin borders, 25X36 mm illumination area, white, 24V
LTPVRG25X36-00-1-R-24V	Flat side-emitting LED backlight, thin borders, 25X36 mm illumination area, red, 24V
LTPVRG25X36-00-1-G-24V	Flat side-emitting LED backlight, thin borders, 25X36 mm illumination area, green, 24V
LTPVRG25X36-00-1-B-24V	Flat side-emitting LED backlight, thin borders, 25X36 mm illumination area, blue, 24V



LTBRDC series

Continuous LED bar lights

LTZPFL040-00-6-W-24V	LED bar light, 6 LED rows, 40X26.3 illumination area, white, 24V
LTZPFL040-00-6-R-24V	LED bar light, 6 LED rows, 40X26.3 illumination area, red, 24V
LTZPFL040-00-6-G-24V	LED bar light, 6 LED rows, 40X26.3 illumination area, green, 24V
LTZPFL040-00-6-B-24V	LED bar light, 6 LED rows, 40X26.3 illumination area, blue, 24V



LTCXC series

Continuous LED coaxial lights

<a href="#">LT2QOG025-00-X-W-24V</a>	LED coaxial light, 25x25.6 mm light emitting area, white, 24V
<a href="#">LT2QOG025-00-X-R-24V</a>	LED coaxial light, 25x25.6 mm light emitting area, red, 24V
<a href="#">LT2QOG025-00-X-G-24V</a>	LED coaxial light, 25x25.6 mm light emitting area, green, 24V
<a href="#">LT2QOG025-00-X-B-24V</a>	LED coaxial light, 25x25.6 mm light emitting area, blue, 24V



CMHO series

Clamping mechanics

[CMHO016](#) Clamping mechanics for TCxx016 lenses and LTCLHP016-X illuminators



PTTC, PTCP series

Accurate calibration patterns for machine vision systems

[PT016-024](#) Calibration pattern

[PT016-024-C](#) Calibration pattern for telecentric lenses with a certificate of conformity



LTPR series

LED patterns projectors

[LTPRHP3W-W](#) LED pattern projector 3W, HP, white

[LTPRHP3W-R](#) LED pattern projector 3W, HP, red

[LTPRHP3W-G](#) LED pattern projector 3W, HP, green

[LTPRHP3W-B](#) LED pattern projector 3W, HP, blue

[LTPRUP-W](#) 90W strobed LED pattern projector white

[LTPRUP-R](#) 90W strobed LED pattern projector red

[LTPRUP-G](#) 90W strobed LED pattern projector green

[LTPRUP-B](#) 90W strobed LED pattern projector blue



COE-G series

GenICam® PoE cameras

[COE-003-M-POE-010-IR-C](#) Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Gray, GigE, POE, 173 fps, C - mount, Glass filter

[COE-004-M-POE-010-IR-C](#) Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Gray, 300 fps, GigE, POE, C - mount, Glass filter

[COE-003-C-POE-010-IR-C](#) Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Color, 173 fps, GigE, POE, C - mount, Infrared cut filter

[COE-004-C-POE-010-IR-C](#) Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Color, 300 fps, GigE, POE, C - mount, Infrared cut filter

[COE-003-M-POE-020-IR-C](#) Area Scan camera RJ33B4AD0DT, CCD, Global shutter, 640 x 480, 0.3 MP, 7.4 pix, 1/3", Gray, 200 fps, GigE, POE, C - mount, Glass filter

[COE-003-C-POE-020-IR-C](#) Area Scan camera RJ33B4AD0DT, CCD, Global shutter, 640 x 480, 0.3 MP, 7.4 pix, 1/3", Color, 200 fps, GigE, POE, C - mount, Infrared cut filter

[COE-012-M-POE-020-IR-C](#) Area Scan camera RJ33J4CA3DE, CCD, Global shutter, 1280 x 960, 1.2 MP, 3.75 pix, 1/3", Gray, 30 fps, GigE, POE, C - mount, Glass filter

[COE-012-C-POE-020-IR-C](#) Area Scan camera RJ33J4CA3DE, CCD, Global shutter, 1280 x 960, 1.2 MP, 3.75 pix, 1/3", Color, 30 fps, GigE, POE, C - mount, Infrared cut filter



COE-U series

USB 3.0 GenICam® cameras

[COE-003-M-USB-010-IR-C](#) Area Scan camera PYTHON 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Gray, 814 fps, USB 3.0, C - mount, Glass filter

[COE-003-C-USB-010-IR-C](#) Area Scan camera PYTHON 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Color, 814 fps, USB 3.0, C - mount, Infrared cut filter



mvBlueCOUGAR series

GigE & Dual GigE Vision cameras

[RT-mvBC-X100w](#) Camera with interface GigE (1GB/s), sensor size 1/3", mpixel 0.36, resolution 752 x 480, sensor name MT9V034, sensor type CMOS

Accessories



Accessories and add-ons to make the most of Opto Engineering lenses.

---

[RT-mvBC-X104iC](#) CMOS camera GIGE, 2064 x 1544 color, 1/1.8", 37 Hz, IR cut, C-mount, I/O

---

[RT-mvBC-X105bC](#) CMOS camera GIGE, 2464 x 2056 Colour sensor, 2/3", 23.5 Hz, IR cut, C-mount, I/O

---