


TC13096

Bi-telecentric lens for 1/3" detectors, magnification 0.050 x, C-mount

SPECIFICATIONS

Magnification	(x)	0.050
Image circle Ø	(mm)	6.0
Object field of view(8)		
with 1/3" detector (4.8 x 3.6 mm)	(mm × mm)	96.00 x 72.00
with 1/2.5" detector (5.70 x 4.28 mm)	(mm × mm)	Ø = 85.6
with 1/2" detector (6.4 x 4.8 mm)	(mm × mm)	Ø = 96.0
with 1/1.8" detector (7.13 x 5.37 mm) (7)	(mm × mm)	Ø = 106.6
with 2/3" - 5 MP detector (8.45 x 7.07 mm)	(mm × mm)	Ø = 120.0
Optical specifications		
Working distance (1)	(mm)	279.6
wF/# (2)		8
Telecentricity typical (max) (3)	(deg)	< 0.06 (0.08)
Distortion typical (max) (4)	(%)	< 0.04 (0.10)
Field depth (5)	(mm)	268
CTF @ 70 lp/mm	(%)	> 50
Dimensions		
Mount		C
Phase Adjustment (9)		
Length (6)	(mm)	303.3
Diameter	(mm)	143
Mass	(g)	2400

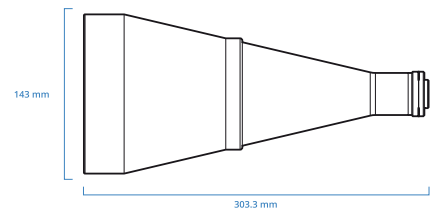

NOTES

1. Working distance: distance between the front end of the mechanics and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
2. Working F-number (higher wF/#): the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
3. Maximum slope of chief rays inside the lens: when converted to millirad, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
4. Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
5. At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 5.5 µm.
6. Measured from the front end of the mechanics to the camera flange.
7. With 1/1.8" (8.9 mm diagonal) detectors, the FOV of TC12yyy lenses may show some vignetting at the image corners, as these lenses are optimized for 1/2" detectors (8 mm diagonal).
8. For the fields with the indication "Ø =", the image of a circular object of such diameter is fully inscribed into the detector.
9. Indicates the availability of an integrated camera phase adjustment feature. If missing, it can be supplied upon request (except for TC23004, TC23007, TC23009, TC23012).

COMPATIBLE PRODUCTS

Despite the efforts made to generate an error-free compatibility list, we always recommend to consult the Opto Engineering® technical support department before purchasing a compatible product. Opto Engineering® shall not be liable for any damage or malfunctioning caused by the incorrect selection of a compatible product.



LTCLHP series

High-performance telecentric illuminators

LTCLHP096-R	Telecentric HP illuminator, beam diameter 120 mm, red
LTCLHP096-B	Telecentric HP illuminator, beam diameter 120 mm, blue
LTCLHP096-W	Telecentric HP illuminator, beam diameter 120 mm, white



LTCLHP CORE series

Ultra compact telecentric illuminators

LTCLCR096-R	Telecentric CORE illuminator, beam dimensions $\varnothing = 120$; x = 99, red
LTCLCR096-G	Telecentric CORE illuminator, beam dimensions $\varnothing = 120$; x = 99, green
LTCLCR096-W	Telecentric CORE illuminator, beam dimensions $\varnothing = 120$; x = 99, white



LTLADC series

Continuous LED low angle direct ringlights

LTZZO170-75-3-W24V	LED low angle ringlight, 3 LED rows, outer diameter 175 mm, 75°, white, 24V
LTZZO170-75-3-R-24V	LED low angle ringlight, 3 LED rows, outer diameter 175 mm, 75°, red, 24V
LTZZO170-75-3-G-24V	LED low angle ringlight, 3 LED rows, outer diameter 175 mm, 75°, green, 24V
LTZZO170-75-3-B-24V	LED low angle ringlight, 3 LED rows, outer diameter 175 mm, 75°, blue, 24V



LTRNST series

LED ring illuminators - straight type

LTRN096RD	Ring LED illuminator, inner diameter 143 mm, straight type, red 630 nm
LTRN096GR	Ring LED illuminator, inner diameter 143 mm, straight type, green 525 nm
LTRN096BL	Ring LED illuminator, inner diameter 143 mm, straight type, blue 470 nm
LTRN096NW	Ring LED illuminator, inner diameter 143 mm, straight type, white



LTBC series

Continuous LED backlight

LTBC174174-W	Continuous LED backlight, 174x174 illumination area, white
LTBC174174-G	Continuous LED backlight, 174x174 illumination area, green



LTBRDC series

Continuous LED bar lights

LTZPFL160-00-6-W-24V	LED bar light, 6 LED rows, 160X26.3 illumination area, white, 24V
LTZPFL160-00-6-R-24V	LED bar light, 6 LED rows, 160X26.3 illumination area, red, 24V
LTZPFL160-00-6-G-24V	LED bar light, 6 LED rows, 160X26.3 illumination area, green, 24V
LTZPFL160-00-6-B-24V	LED bar light, 6 LED rows, 160X26.3 illumination area, blue, 24V



CMMR series

45° first surface mirrors

CMMR096	45° first surface mirror for 143 mm clamping diameter optics
---------	--



WI series

Protective windows

WI096	Protective window for 143 mm clamping diameter optics
-------	---



CMHO series

Clamping mechanics

CMHO096	Clamping mechanics for TCxx085, TCxx096 lenses and LTCLHP096-X illuminators
---------	---



PTTC, PTCP series

Accurate calibration patterns for machine vision systems

PT064-096	Calibration pattern
-----------	---------------------



CMT series

Precision alignment mechanics

CMTH096 Precision alignment mechanics for telecentric optics 096



LTPR series

LED patterns projectors

LTPRHP3W-W	LED pattern projector 3W, HP, white
LTPRHP3W-R	LED pattern projector 3W, HP, red
LTPRHP3W-G	LED pattern projector 3W, HP, green
LTPRHP3W-B	LED pattern projector 3W, HP, blue
LTPRUP-W	90W strobed LED pattern projector white
LTPRUP-R	90W strobed LED pattern projector red
LTPRUP-G	90W strobed LED pattern projector green
LTPRUP-B	90W strobed LED pattern projector blue



COE-G series

GenlCam® PoE cameras

COE-003-M-POE-010-IR-C	Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Gray, GigE, POE, 173 fps, C - mount, Glass filter
COE-004-M-POE-010-IR-C	Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Gray, 300 fps, GigE, POE, C - mount, Glass filter
COE-003-C-POE-010-IR-C	Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Color, 173 fps, GigE, POE, C - mount, Infrared cut filter
COE-004-C-POE-010-IR-C	Area Scan camera Python 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Color, 300 fps, GigE, POE, C - mount, Infrared cut filter
COE-003-M-POE-020-IR-C	Area Scan camera RJ33B4AD0DT, CCD, Global shutter, 640 x 480, 0.3 MP, 7.4 pix, 1/3", Gray, 200 fps, GigE, POE, C - mount, Glass filter
COE-003-C-POE-020-IR-C	Area Scan camera RJ33B4AD0DT, CCD, Global shutter, 640 x 480, 0.3 MP, 7.4 pix, 1/3", Color, 200 fps, GigE, POE, C - mount, Infrared cut filter
COE-012-M-POE-020-IR-C	Area Scan camera RJ33J4CA3DE, CCD, Global shutter, 1280 x 960, 1.2 MP, 3.75 pix, 1/3", Gray, 30 fps, GigE, POE, C - mount, Glass filter
COE-012-C-POE-020-IR-C	Area Scan camera RJ33J4CA3DE, CCD, Global shutter, 1280 x 960, 1.2 MP, 3.75 pix, 1/3", Color, 30 fps, GigE, POE, C - mount, Infrared cut filter



COE-U series

USB 3.0 GenlCam® cameras

COE-003-M-USB-010-IR-C	Area Scan camera PYTHON 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Gray, 814 fps, USB 3.0, C - mount, Glass filter
COE-003-C-USB-010-IR-C	Area Scan camera PYTHON 300, CMOS, Global shutter, 640 x 480, 0.3 MP, 4.8 pix, 1/4", Color, 814 fps, USB 3.0, C - mount, Infrared cut filter



mvBlueCOUGAR series

GigE & Dual GigE Vision cameras

RT-mvBC-X100w	Camera with interface GigE (1GB/s), sensor size 1/3", mpixel 0.36, resolution 752 x 480, sensor name MT9V034, sensor type CMOS
---------------	--



Accessories

Accessories and add-ons to make the most of Opto Engineering lenses.

RT-mvBC-X104iC	CMOS camera GIGE, 2064 x 1544 color, 1/1.8", 37 Hz, IR cut, C-mount, I/O
RT-mvBC-X105bC	CMOS camera GIGE, 2464 x 2056 Colour sensor, 2/3", 23.5 Hz, IR cut, C-mount, I/O