


TCSM016

3D bi-telecentric lens with Scheimpflug adjustment

SPECIFICATIONS

Horizontal magnification		0.528
		0.528
		0.528
		0.528
Vertical magnification		0.528
		0.522
		0.505
		0.478
Max object tilt	(deg)	0.0
		10.0
		20.0
		30.0
Max Mount tilt	(deg)	0.0
		5.3
		10.9
		17.0
Long detector side horizontal - Field of view (mm x mm)		
1/3" (4.8 x 3.6)	(mm x mm)	9.09 x 6.82
		9.09 x 6.89
		9.09 x 7.13
		9.09 x 7.53
1/2" (6.4 x 4.8)	(mm x mm)	12.12 x 9.09
		12.12 x 9.19
		12.12 x 9.50
		12.12 x 10.04
2/3" (8.8 x 6.6)	(mm x mm)	16.10 x 13.43
		16.10 x 13.58
		16.10 x 14.04
		16.10 x 14.83
Long detector side vertical - Field of view (mm x mm)		
1/3" (3.6 x 4.8)	(mm x mm)	6.82 x 9.09
		6.82 x 9.19
		6.82 x 9.50
		6.82 x 10.04
1/2" (4.8 x 6.4)	(mm x mm)	9.09 x 12.12
		9.09 x 12.26
		9.09 x 12.67
		9.09 x 13.39
2/3" (6.6 x 8.8)	(mm x mm)	13.43 x 16.10
		13.43 x 16.28
		13.43 x 16.83
		13.43 x 17.78
Optical specifications		
Working distance 1	(mm)	45.3
wF/# 2		8
Field depth	(mm)	2
CTF @ 50 lp/mm		25
Mechanical specifications		
Mount		C
Maximum length	(mm)	119.3
Front diameter	(mm)	37.7
Mass	(g)	311

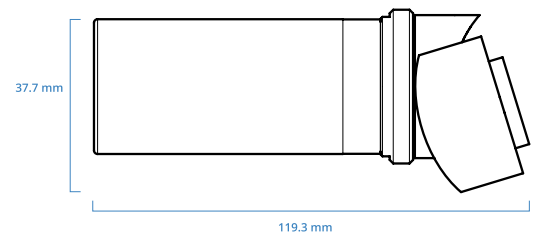

NOTES

1. Working distance: distance between the front end of the mechanics and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
2. Indicates the availability of an integrated camera phase adjustment feature.

COMPATIBLE PRODUCTS

Despite the efforts made to generate an error-free compatibility list, we always recommend to consult the Opto Engineering® technical support department before purchasing a compatible product. Opto Engineering® shall not be liable for any damage or malfunctioning caused by the incorrect selection of a compatible product.



LTRNST series

LED ring illuminators - straight type

LTRN016RD	Ring LED illuminator, inner diameter 37 mm, straight type, red 630 nm
LTRN016GR	Ring LED illuminator, inner diameter 37 mm, straight type, green 525 nm
LTRN016BL	Ring LED illuminator, inner diameter 37 mm, straight type, blue 470 nm
LTRN016NW	Ring LED illuminator, inner diameter 37 mm, straight type, white



LTBC series

Continuous LED backlight

LTBC054054-W	Continuous LED backlight, 54x54 illumination area, white
LTBC054054-G	Continuous LED backlight, 54x54 illumination area, green



CMHO series

Clamping mechanics

CMHO016	Clamping mechanics for TCxx016 lenses and LTCLHP016-X illuminators
---------	--



COE-G series

GenICam® PoE cameras

COE-032-M-POE-040-IR-C	Area Scan camera IMX265, CMOS, Global shutter, 2048 x 1536, 3.1 MP, 3.45 pix, 1/1.8", Gray, 37.5 fps, GigE, POE, C - mount, Glass filter
COE-032-C-POE-040-IR-C	Area Scan camera IMX265, CMOS, Global shutter, 2048 x 1536, 3.1 MP, 3.45 pix, 1/1.8", Color, 37.5 fps, GigE, POE, C - mount, Infrared cut filter
COE-063-M-POE-040-IR-C-B	Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Gray, 17 fps, GigE, POE, C - mount, Glass filter
COE-063-C-POE-040-IR-C	Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Color, 17 fps, GigE, POE, C - mount, Infrared cut filter
COE-122-M-POE-041-IR-C	Area Scan camera IMX226, CMOS, Rolling shutter, 4024 x 3036, 12.2 MP, 1.85 pix, 1/1.7", Gray, 9.6 fps, GigE, POE, C - mount, Glass filter
COE-122-C-POE-041-IR-C	Area Scan camera IMX226, CMOS, Rolling shutter, 4024 x 3036, 12.2 MP, 1.85 pix, 1/1.7", Color, 9.6 fps, GigE, POE, C - mount, Infrared cut filter
COE-023-M-POE-050-IR-C	Area Scan camera PYTHON 2000, CMOS, Global shutter, 1920 x 1200, 2.3 MP, 4.8 pix, 2/3", Gray, 51 fps, GigE, POE, C - mount, Glass filter
COE-023-C-POE-050-IR-C	Area Scan camera PYTHON 2000, CMOS, Global shutter, 1920 x 1200, 2.3 MP, 4.8 pix, 2/3", Color, 51 fps, GigE, POE, C - mount, Infrared cut filter
COE-050-M-POE-050-IR-C	Area Scan camera IMX264, CMOS, Global shutter, 2448 x 2048, 5 MP, 3.45 pix, 2/3", Gray, 23.5 fps, GigE, POE, C - mount, Glass filter
COE-050-C-POE-050-IR-C	Area Scan camera IMX264, CMOS, Global shutter, 2448 x 2048, 5 MP, 3.45 pix, 2/3", Color, 23.5 fps, GigE, POE, C - mount, Infrared cut filter



COE-U series

USB 3.0 GenICam® cameras

COE-063-M-USB-040-IR-C	Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Gray, 42 fps, USB 3.0, C - mount, Glass filter
COE-063-C-USB-040-IR-C	Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Color, 42 fps, USB 3.0, C - mount, Infrared cut filter
COE-050-M-USB-050-IR-C	Area Scan camera IMX264, CMOS, Global shutter, 2448 x 2048, 5 MP, 3.45 pix, 2/3", Gray, 35 fps, USB 3.0, C - mount, Glass filter



mvBlueFOX3-2 series

USB3 vision camera with Sony Pregius CMOS sensors

RT-mvBF3-2032a	USB3 Vision camera with Sony Pregius CMOS sensor IMX265
RT-mvBF3-2032	USB3 Vision camera with Sony Pregius CMOS sensor IMX252
RT-mvBF3-2064	Usb3 vision camera with sony pregius cmos sensor imx178

RT-mvBF3-2051a	USB3 Vision camera with Sony Pregius CMOS sensor IMX264
RT-mvBF3-2051	USB3 Vision camera with Sony Pregius CMOS sensor IMX250



mvBlueCOUGAR series

GigE & Dual GigE Vision cameras

RT-mvBC-X104i	Camera with interface GigE (1GB/s), sensor size 1/1.8", mpixel 3.19, resolution 2064 x 1544, sensor name IMX265, sensor type CMOS
RT-mvBC-XD104h	Camera with interface Dual GigE (2GB/s), sensor size 1/1.8", mpixel 3.19, resolution 2064 x 1544, sensor name IMX252, sensor type CMOS
RT-mvBC-X105b	Camera with interface GigE (1GB/s), sensor size 2/3", mpixel 5.07, resolution 2464 x 2056, sensor name IMX264, sensor type CMOS
RT-mvBC-XD105a	Camera with interface Dual GigE (2GB/s), sensor size 2/3", mpixel 5.01, resolution 2448 x 2048, sensor name IMX250, sensor type CMOS



Accessories

Accessories and add-ons to make the most of Opto Engineering lenses.

RT-mvBC-X104iC	CMOS camera GIGE, 2064 x 1544 color, 1/1.8", 37 Hz, IR cut, C-mount, I/O
RT-mvBC-X105bC	CMOS camera GIGE, 2464 x 2056 Colour sensor, 2/3", 23.5 Hz, IR cut, C-mount, I/O