

TCZR072S

Bi-telecentric zoom with motorized controls, magnification 0.125x to 1x, for detectors up to 2/3"

SPECIFICATIONS

Magnification	(x)	0.125	0.250	0.500	1.000
Image circle Ø	(mm)	11.0			

Object field of view	(mm x mm)				
with 1/3" detector (4.8 x 3.6 mm)	38.4 x 28.8	19.2 x 14.4	9.6 x 7.2	4.8 x 3.6	
with 1/2.5" detector (5.70 x 4.28 mm)	45.6 x 34.2	22.8 x 17.1	11.4 x 8.56	5.70 x 4.28	
with 1/2" detector (6.4 x 4.8 mm)	51.2 x 38.4	25.6 x 19.2	12.8 x 9.6	6.4 x 4.8	
with 1/1.8" detector (7.13 x 5.37 mm)	57.0 x 42.6	28.5 x 21.3	14.3 x 10.7	7.13 x 5.33	
with 2/3" - 5 MP detector (8.45 x 7.07 mm)	68.0 x 56.7	34.0 x 28.4	17.0 x 14.2	8.50 x 7.09	

Optical specifications

Working distance	(mm)	157.8			
wF/# (1)		16			
Telecentricity (2)	(deg)	< 0.05			
Distortion	(%)	< 0.1	< 0.08	< 0.05	< 0.07
Field depth (3)	(mm)	53.0	13.2	3.3	0.8
CTF @ 70 lp/mm	(%)	> 35	> 40	> 40	> 35
Reference point repeatability at 1 σ (5)	(μ m)	< 6	< 5	< 2	< 4
Max. image displacement between magnification changes (image side)	(μ m)	350			

Mechanical specifications

Length	(mm)	279.7
Diameter	(mm)	99
Max Height	(mm)	144
Max Width	(mm)	103
Mass	(g)	2850
Mount		C
Phase adjustment(4)		Yes
Min. time for magnification change(6)	(s)	1.5
Max. time for magnification change(7)	(s)	2.0

Electrical specifications


Connector	DB15HD male
-----------	-------------

Motor parameters

N° of motors	1
Type	Bipolar stepper
RMS winding current	(mA) 600
Winding voltage	(V) 24
Steps per revolution	200

Encoder parameters

N° of encoders	1
DC power supply	(V) 5
Maximum supply current	(mA) 30
Type	Magnetic rotary, incremental with reference
Output signals	A, B, Z (index)
Interfaces	RS422
Number of magnetic poles	120

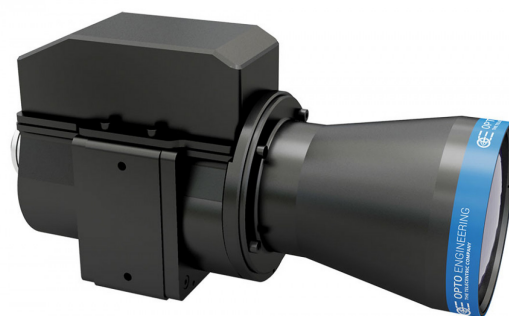

Poles pitch	(mm)	2
Interpolation		500
Pulses per revolution		60000
Motor to encoder ratio(8)		2.56
Environmental specifications		
Operating temperature	°C	0 to 40
Storage temperature	°C	0 to 50
Operating Humidity	%	10-85 non condensing
IP rating		-
Installation		Indoor use only

NOTES

- Working F/#: the real F/# of a lens when used as a macro. Lenses with smaller apertures (higher wf#) can be supplied on request.
- Maximum slope of principal rays inside the lens: when converted to millirad, it gives the maximum measurement error for any millimeter of object displacement
- At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 3.45 μm .
- Indicates the availability of an integrated camera phase adjustment feature.
- Image size, σ = standard deviation.
- One magnification step
- Two magnification steps
- 1 encoder pulse = 2.56 motor μsteps (with a 256 microstepping control).

COMPATIBLE PRODUCTS

Despite the efforts made to generate an error-free compatibility list, we always recommend to consult the Opto Engineering® technical support department before purchasing a compatible product. Opto Engineering® shall not be liable for any damage or malfunctioning caused by the incorrect selection of a compatible product.



LTCLHP CORE series

Ultra compact telecentric illuminators

[LTCLCR080-R](#) Telecentric CORE illuminator, beam dimensions $\varnothing = 98$; x = 90, red

[LTCLCR080-G](#) Telecentric CORE illuminator, beam dimensions $\varnothing = 98$; x = 90, green

[LTCLCR080-W](#) Telecentric CORE illuminator, beam dimensions $\varnothing = 98$; x = 90, white



LTLA series

High-power strobed LED low angle diffused ringlights

[LTLAC1-W](#) Diffusive strobed low angle ring light illuminator - large size medium power white

[LTLAC2-R](#) Diffusive strobed low angle ring light illuminator - large size high power red

[LTLAC2-G](#) Diffusive strobed low angle ring light illuminator - large size high power green

[LTLAC2-W](#) Diffusive strobed low angle ring light illuminator - large size high power white



LTRNST series

LED ring illuminators - straight type

[LTRN064RD](#) Ring LED illuminator, inner diameter 100 mm, straight type, red 630 nm

[LTRN064GR](#) Ring LED illuminator, inner diameter 100 mm, straight type, green 525 nm

[LTRN064BL](#) Ring LED illuminator, inner diameter 100 mm, straight type, blue 470 nm

[LTRN064NW](#) Ring LED illuminator, inner diameter 100 mm, straight type, white



LTBC series

Continuous LED backlight

[LTBC114114-W](#) Continuous LED backlight, 114x114 illumination area, white

[LTBC114114-G](#) Continuous LED backlight, 114x114 illumination area, green



CB series

Cables

CBMT002 15 wires cable, DB15HD Male to DB15HD Female connector, 2 m



MTDV

Motion controller for bipolar stepper motors with additional encoder input

MTDV1CH-22A2 Motion controller for bipolar stepper motors with additional encoder input

MTDV2CH-22A2 Motion controller for bipolar stepper motors with additional encoder input

MTDV3CH-22A3 Motion controller for bipolar stepper motors with additional encoder input

MTDV4CH-22A4 Motion controller for bipolar stepper motors with additional encoder input

 COE-G series

GenICam® PoE cameras

COE-050-M-POE-023-IR-C Area Scan camera MT9P031, CMOS, Rolling shutter, 2592 x 1944, 5 MP, 2.2 pix, 1/2.5", Gray, 14 fps, GigE, POE, C - mount, Glass filter

COE-013-M-POE-030-IR-C Area Scan camera PYTHON 1300, CMOS, Global shutter, 1280 x 1024, 1.3 MP, 4.8 pix, 1/2", Gray, 90 fps, GigE, POE, C - mount, Glass filter

COE-013-C-POE-030-IR-C Area Scan camera PYTHON 1300, CMOS, Global shutter, 1280 x 1024, 1.3 MP, 4.8 pix, 1/2", Color, 90 fps, GigE, POE, C - mount, Infrared cut filter

COE-106-M-POE-031-IR-C-2 Area Scan camera MT9J003, CMOS, Rolling shutter, 3840 x 2748, 10.6 MP, 1.67 pix, 1/2.3", Gray, 11 fps, GigE, POE, C - mount, Glass filter

COE-106-C-POE-031-IR-C Area Scan camera MT9J003, CMOS, Global shutter, 3840 x 2748, 10.6 MP, 1.67 pix, 1/2.3", Color, 7 fps, GigE, POE, C - mount, Infrared cut filter

COE-032-M-POE-040-IR-C Area Scan camera IMX265, CMOS, Global shutter, 2048 x 1536, 3.1 MP, 3.45 pix, 1/1.8", Gray, 37.5 fps, GigE, POE, C - mount, Glass filter

COE-032-C-POE-040-IR-C Area Scan camera IMX265, CMOS, Global shutter, 2048 x 1536, 3.1 MP, 3.45 pix, 1/1.8", Color, 37.5 fps, GigE, POE, C - mount, Infrared cut filter

COE-063-M-POE-040-IR-C-B Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Gray, 17 fps, GigE, POE, C - mount, Glass filter

COE-063-C-POE-040-IR-C Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Color, 17 fps, GigE, POE, C - mount, Infrared cut filter

COE-122-M-POE-041-IR-C Area Scan camera IMX226, CMOS, Rolling shutter, 4024 x 3036, 12.2 MP, 1.85 pix, 1/1.7", Gray, 9.6 fps, GigE, POE, C - mount, Glass filter

COE-122-C-POE-041-IR-C Area Scan camera IMX226, CMOS, Rolling shutter, 4024 x 3036, 12.2 MP, 1.85 pix, 1/1.7", Color, 9.6 fps, GigE, POE, C - mount, Infrared cut filter

COE-023-M-POE-050-IR-C Area Scan camera PYTHON 2000, CMOS, Global shutter, 1920 x 1200, 2.3 MP, 4.8 pix, 2/3", Gray, 51 fps, GigE, POE, C - mount, Glass filter

COE-023-C-POE-050-IR-C Area Scan camera PYTHON 2000, CMOS, Global shutter, 1920 x 1200, 2.3 MP, 4.8 pix, 2/3", Color, 51 fps, GigE, POE, C - mount, Infrared cut filter

COE-050-M-POE-050-IR-C Area Scan camera IMX264, CMOS, Global shutter, 2448 x 2048, 5 MP, 3.45 pix, 2/3", Gray, 23.5 fps, GigE, POE, C - mount, Glass filter

COE-050-C-POE-050-IR-C Area Scan camera IMX264, CMOS, Global shutter, 2448 x 2048, 5 MP, 3.45 pix, 2/3", Color, 23.5 fps, GigE, POE, C - mount, Infrared cut filter

 COE-U series

USB 3.0 GenICam® cameras

COE-016-M-USB-021-IR-C Area Scan camera IMX273, CMOS, Global shutter, 1440 x 1080, 1.6 MP, 3.45 pix, 1/2.9", Gray, 165 fps, USB 3.0, C - mount, Glass filter

COE-016-C-USB-021-IR-C Area Scan camera IMX273, CMOS, Global shutter, 1440 x 1080, 1.6 MP, 3.45 pix, 1/2.9", Color, 165 fps, USB 3.0, C - mount, Infrared cut filter

COE-050-C-USB-023-IR-C Area Scan camera AR0521, CMOS, Rolling shutter, 2592 x 1944, 5 MP, 2.2 pix, 1/2.5", Color, 31 fps, USB 3.0, C - mount, Infrared cut filter

COE-013-M-USB-030-IR-C Area Scan camera PYTHON 1300, CMOS, Global shutter, 1280 x 1024, 1.3 MP, 4.8 pix, 1/2", Gray, 170 fps, USB 3.0, C - mount, Glass filter

COE-013-C-USB-030-IR-C Area Scan camera PYTHON 1300, CMOS, Global shutter, 1280 x 1024, 1.3 MP, 4.8 pix, 1/2", Color, 90 fps, USB 3.0, C - mount, Infrared cut filter

COE-063-M-USB-040-IR-C Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Gray, 42 fps, USB 3.0, C - mount, Glass filter

COE-063-C-USB-040-IR-C Area Scan camera IMX178, CMOS, Rolling shutter, 3072 x 2048, 6.3 MP, 2.4 pix, 1/1.8", Color, 42 fps, USB 3.0, C - mount, Infrared cut filter

COE-050-M-USB-050-IR-C Area Scan camera IMX264, CMOS, Global shutter, 2448 x 2048, 5 MP, 3.45 pix, 2/3", Gray, 35 fps, USB 3.0, C - mount, Glass filter



mvBlueFOX3-2 series

USB3 vision camera with Sony Pregius CMOS sensors

RT-mvBF3-2004	Usb3 vision camera with sony pregius cmos sensor imx287
RT-mvBF3-2016	Usb3 vision camera with sony pregius cmos sensor imx273
RT-mvBF3-2032a	USB3 Vision camera with Sony Pregius CMOS sensor IMX265
RT-mvBF3-2032	USB3 Vision camera with Sony Pregius CMOS sensor IMX252
RT-mvBF3-2064	Usb3 vision camera with sony pregius cmos sensor imx178
RT-mvBF3-2051a	USB3 Vision camera with Sony Pregius CMOS sensor IMX264
RT-mvBF3-2051	USB3 Vision camera with Sony Pregius CMOS sensor IMX250



mvBlueCOUGAR series

GigE & Dual GigE Vision cameras

RT-mvBC-X100w	Camera with interface GigE (1GB/s), sensor size 1/3", mpixel 0.36, resolution 752 x 480, sensor name MT9V034, sensor type CMOS
RT-mvBC-X100f	Camera with interface GigE (1GB/s), sensor size 1/2.9", mpixel 0.4, resolution 728 x 544, sensor name IMX287, sensor type CMOS
RT-mvBC-X102f	Camera with interface GigE (1GB/s), sensor size 1/2.9", mpixel 1.58, resolution 1456 x 1088, sensor name IMX273, sensor type CMOS
RT-mvBC-XD102f	Camera with interface Dual GigE (2GB/s), sensor size 1/2.9", mpixel 1.58, resolution 1456 x 1088, sensor name IMX273, sensor type CMOS
RT-mvBC-X105	Camera with interface GigE (1GB/s), sensor size 1/2.5", mpixel 5.04, resolution 2592 x 1944, sensor name MT9P031, sensor type CMOS
RT-mvBC-X1010	Camera with interface GigE (1GB/s), sensor size 1/2.3", mpixel 10.66, resolution 3856 x 2764, sensor name MT9J003, sensor type CMOS
RT-mvBC-X104i	Camera with interface GigE (1GB/s), sensor size 1/1.8", mpixel 3.19, resolution 2064 x 1544, sensor name IMX265, sensor type CMOS
RT-mvBC-XD104h	Camera with interface Dual GigE (2GB/s), sensor size 1/1.8", mpixel 3.19, resolution 2064 x 1544, sensor name IMX252, sensor type CMOS
RT-mvBC-X105b	Camera with interface GigE (1GB/s), sensor size 2/3", mpixel 5.07, resolution 2464 x 2056, sensor name IMX264, sensor type CMOS
RT-mvBC-XD105a	Camera with interface Dual GigE (2GB/s), sensor size 2/3", mpixel 5.01, resolution 2448 x 2048, sensor name IMX250, sensor type CMOS



Accessories

Accessories and add-ons to make the most of Opto Engineering lenses.

RT-mvBC-X104iC	CMOS camera GIGE, 2064 x 1544 color, 1/1.8", 37 Hz, IR cut, C-mount, I/O
RT-mvBC-X105bC	CMOS camera GIGE, 2464 x 2056 Colour sensor, 2/3", 23.5 Hz, IR cut, C-mount, I/O