

overview

- 1920 × 1080 px
- Sony IMX290
- 1/2" CMOS
- 58 fps
- Gigabit Ethernet



technical data

sensor information

sensor	Sony IMX290
resolution	1920 × 1080 px
exposure time	0,0015 ... 60000 ms
pixel size	2.9 × 2.9 μm
shutter type	Rolling shutter Global reset shutter
sensor type	1/2" CMOS

acquisition formats

image formats, interface frame rate max.	Full Frame, 1920 × 1080 px, max. 58 fps Binning 2×2, 960 × 540 px, max. 89 fps Binning 2×1, 960 × 1080 px, max. 58 fps Binning 1×2, 1920 × 540 px, max. 89 fps
--	---

image formats, acquisition frame rate max. (Burst Mode)	Full Frame, 1920 × 1080 px, max. 89 fps
---	---

pixel formats	BayerRG8 BayerRG10 BayerRG12 BayerRG12 Packed Mono8 Mono10 Mono12 Mono12 Packed RGB8 BGR8
---------------	--

image preprocessing

analog controls	Gain (0 ... 48 dB) Offset (0 ... 255 LSB 12 Bit)
-----------------	---

image preprocessing

color models	Mono Raw Bayer RGB BGR
--------------	---------------------------------

camera features

synchronization	free running trigger
trigger sources	Hardware software ActionCommand
trigger delay	0 ... 2 sec, tracking and buffering of up to 256 trigger signals
internal image buffer	95 MB 16 images (Trigger Mode) 1 image (Free Running Mode)

interfaces and connectors

data interface	Gigabit Ethernet, Transfer rate 1000 Mb/s, Fast Ethernet, Transfer Rate 100 Mb/s, Connector: 8P8C Modular Jack (RJ45), screwable type
process interface	M8 / 8 pins (SACC-DSI-M8MS-8CON-M8-L180)
power supply	M8 / 8 pins or PoE

mechanical data

lens mount	C-mount
width	29 mm
height	29 mm
depth	49 mm

V CXG-22C.R

Gigabit Ethernet, 1,5 Megapixel, Color

Article number: 11209587

technical data

mechanical data

weight	≤ 120 g
material	zinc die casting, nickel-plated, IP 40


electrical data

voltage supply range +Vs	12 ... 24 V DC (external power supply) 36 ... 57 V DC (Power over Ethernet)
power consumption	approx. 2,0 W @ 12 VDC and 58 fps approx. 2,5 W @ 48 VDC (PoE) and 58 fps

non-volatile memory

flash memory size	128 kB
-------------------	--------

dimension drawing

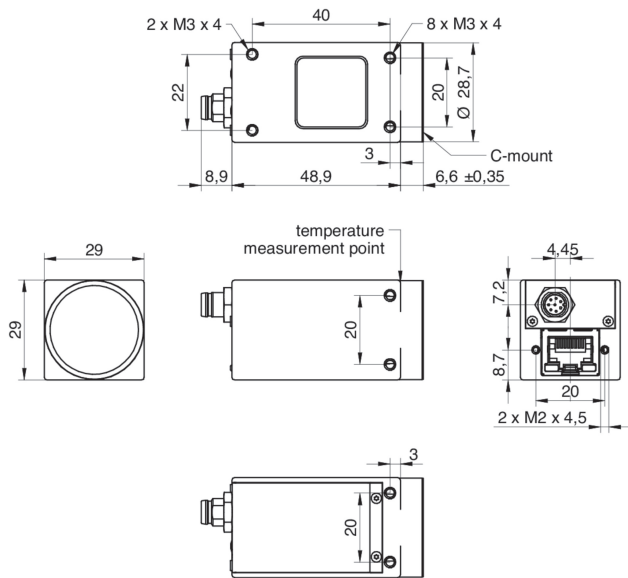

environmental conditions

operating temperature	+5 ... +65 °C @ T = measurement point
humidity	10 ... 90 % (non-condensing)
protection class	IP 40

digital I/Os

lines	1 input line 1 output line 2 general purpose lines
-------	--

conformity

conformity	CE RoHS
------------	------------