

❖ **GO-2400-PGE-1**
2.35-megapixel CMOS global shutter



- *2.35-megapixel 1/1.2" CMOS imager (global shutter)*
- *Up to 48.8 fps at full resolution*
- *5.86 μm square pixels*
- *Small size (29 x 29 x 41.5 mm, excluding lens mount)*
- *8/10/12-bit output* in choice of monochrome or raw Bayer color models*
- *Exposure control from 14.7 μs to 8 seconds in 1 μs steps*
- *2X binning for increased sensitivity (monochrome only)*
- *Single and multi-ROI modes for flexible windowing and use of smaller optics*
- *Automatic Level Control (ALC) for dynamic lighting conditions*
- *Accepts power over GigE Vision interface or separate 6-pin connector*
- *C-mount lens mount*

* Some video processing functions not available with 12-bit output

Specifications for GO-2400-PGE-1

Go Series

Specifications	GO-2400-PGE-1
Sensor	1/1.2" CMOS global shutter (IMX174)
Pixel clock	74.25 MHz (for pulse generator)
Frame rate, full frame	48.8 frames/sec. @ 8-bit
Active area	11.3 mm (h) x 7.13 mm (v), 13.4 mm diagonal
Cell size	5.86 μm (h) x 5.86 μm (v)
Active pixels	1936 (h) x 1216 (v)
Read-out modes	Full ROI (mono) 1936 (h) x 1216 (v) up to 48.8 fps H: 16 to 1936 pixels in 16 pixel steps V: 1 to 1216 lines in 1 line steps ROI (color) H: 16 to 1936 pixels in 16 pixel steps V: 2 to 1216 lines in 2 line steps Binning 1x2, 2x1, 2x2 (monochrome only)
EMVA 1288 Parameters	At 12-bit output
Absolute sensitivity (mono)	7.65 p (λ = 527 nm)
Absolute sensitivity (color)	8.59 p (λ = 527 nm)
Maximum SNR (mono)	44.47 dB
Maximum SNR (color)	44.46 dB
Traditional SNR*	mono >60 dB (0 dB gain) color >60 dB (0 dB gain, green,)
Video signal output	mono 8/10/12-bit monochrome† color 8/10/12-bit raw Bayer†
Gain control	Manual/auto 0 dB to +24 dB
White balance (GO-2400C)	Manual, one-push auto, or continuous (3000K to 9000K)
Gamma	0.45, 0.6, 1.0 or 256-point LUT
Synchronization	Internal
Video modes	Normal, Single ROI, Multi ROI, Sequence (Trigger & Command), Delayed Readout
Trigger input	Opto In, Pulse Generator, Software, NAND Out (2), User Output (2), Action Commands (2)
Trigger modes	EPS, Trigger Width, Sequence
Electronic shutter	
Timed exposure	14.7 μs to 8 sec in 1 μs steps
Auto shutter	1/48 to 1/68027 sec.
Auto Level Control (ALC)	Shutter range from 1/48 to 1/68027, gain range from 0 dB to +24 dB Tracking speeds and min/max values adjustable.
Pre-processing functions	Blemish compensation (256 pixels), shading
Operating temperature	-5°C to +45°C
Storage temperature	-25°C to +60°C
Humidity	20 - 80% non-condensing
Vibration	10 G (20 Hz to 200 Hz XYZ)
Shock	80 G
Regulations	CE (EN55032: 2015, EN55035: 2017), FCC Part 15 class A, RoHS, WEEE
Power	
6-pin connector	12V to 24V DC ± 10%. 3.3W typical @ 12V
PoE	36V to 57V DC. 4.6W typical @ 48V
Lens mount	C-mount
Dimensions (H x W x L)	29 mm x 29 mm x 41.5 mm (excl. lens mount)
Weight	65 g


Ordering Information

GO-2400M-PGE-1	Monochrome camera with GigE Vision
GO-2400C-PGE-1	Color camera with GigE Vision

*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time. For a more complete description, see the manual.

†12-bit output available in bypass mode. See manual for details.

Dimensions

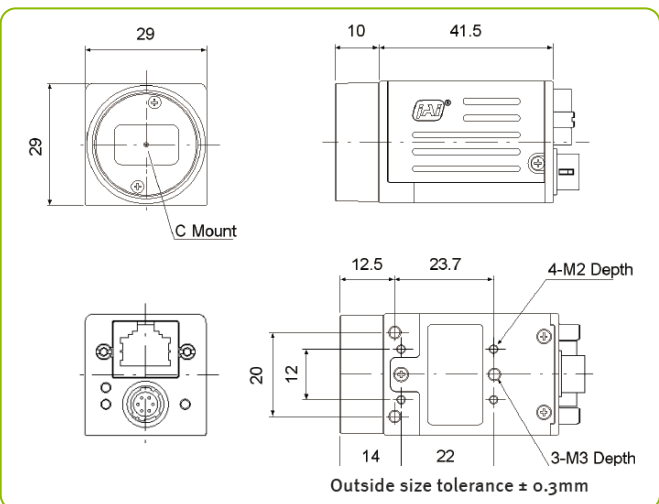

Connector pin-out

DC In / Trigger

HIROSE HR-10A-7R-6PB(73)


Pin	Signal
1	+12V to +24V DC Input
2	Opto In 1
3	Opto Out 1
4	Opto Out 2
5	Opto Common
6	GND

GigE Vision Interface

RJ-45 with locking screws

Pin	Signal
1	TRD+ (0)
2	TRD- (0)
3	TRD+ (1)
4	TRD+ (2)
5	TRD- (2)
6	TRD- (1)
7	TRD+ (3)
8	TRD- (3)

Spectral Response

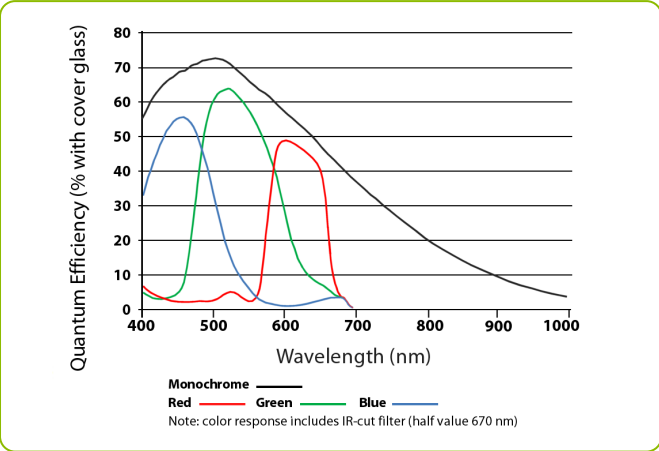

Europe, Middle East & Africa Phone +45 4457 8888 Fax +45 4491 3252	Asia Pacific Phone +81 45 440 0154 Fax +81 45 440 0166	Americas Phone (Toll-Free) 1 800 445 5444 Phone +1 408 383 0300
---	---	--

Visit our web site on www.jai.com


 See the possibilities

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI/JS cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification. October 2023