


	Lens Spe	cification - NMV - 50	M23	
Specification		2/3"	1/1.8"	1/2"
Focal Length		f = 50mm		
Max. Diameter (Ratio)		F = 1:2.8 ~ 22		
Picture Size		6.6x8.8mm		
Angle	Vertical	7.2 deg.	5.9 deg.	5.2 deg.
	Horizontal	9.6 deg.	7.9 deg.	7.0 deg.
	Diagonal	12.1 deg.	9.9 deg.	8.8 deg.
Distortion (TV)		- 0.03%		
Shooting Range at	Vertical	21.9mm	17.9mm	16.0mm
Minimum Focus	Horizontal	29.3mm	23.9mm	21.3mm
Distance	Diagonal	36.6mm	29.9mm	26.6mm
Minimum Focus Distance		0.2m		
Flange Back Focus		17.526mm in air		
Back Focus		35.5mm in air		
Filter Screw Size		M27.0x0.5		
Effective Diameter	Front	21.7mm		
	Rear	14.6mm		
Mount		C-Mount		
Exit Pupil		- 59.5mm		
Temperature Range		-10 ~ +50 deg. C		
Strong Temperature Range		-40 ~ +60 deg. C		
Resolution	Center	100 Line/mm		
	Corner	80 Line/mm		
Weight		95g		

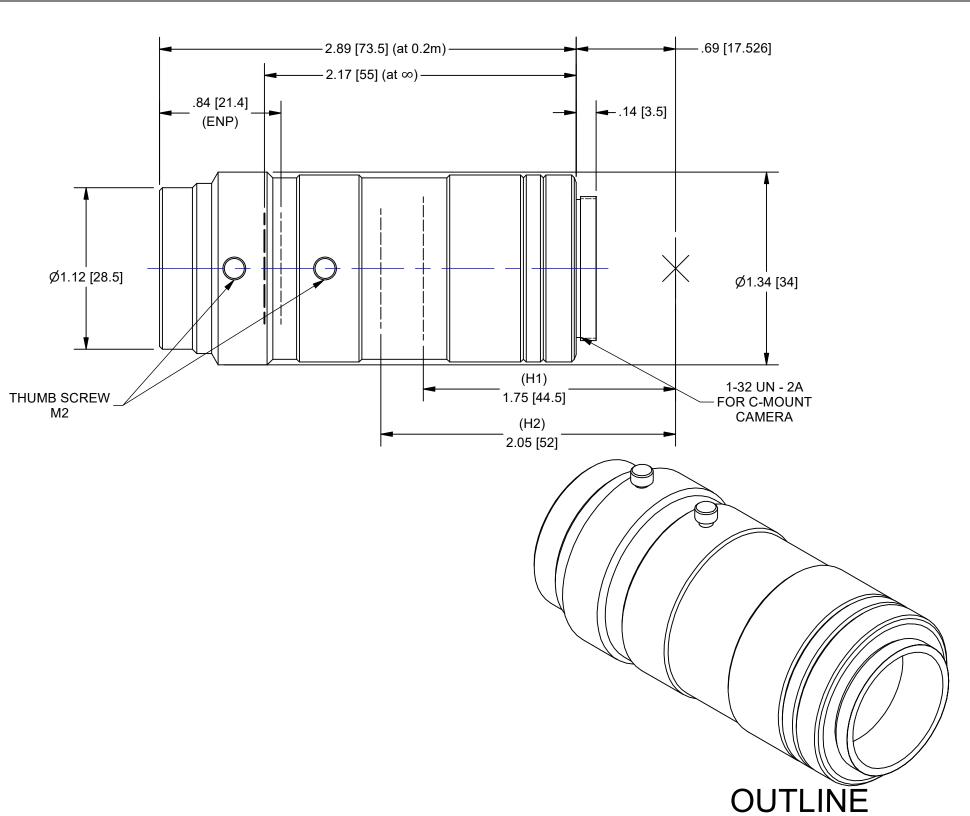

THE CONTENTS OF THIS DOCUMENT ARE PROPRIETARY UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES TO NAVITAR, ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO REQUEST FOR QUOTATION OR PERFORMANCE SCALE: 1.5:1 OF WORK FOR NAVITAR WEIGHT: 0.0 See Table inch 1.0 DR: ΒE JD 0.0 mm 25.0 DO NOT SCALE DRAWING PROJECT #: E2338 DATE DR: 7/11/2007

ROCHESTER, NEW YORK

LENS, 50mm FL, f/2.8, 2/3" MEGAPIXEL

SIZE NMV - 50M23 В

REV В SHEET 1 OF 1