
## SCALE 1:1

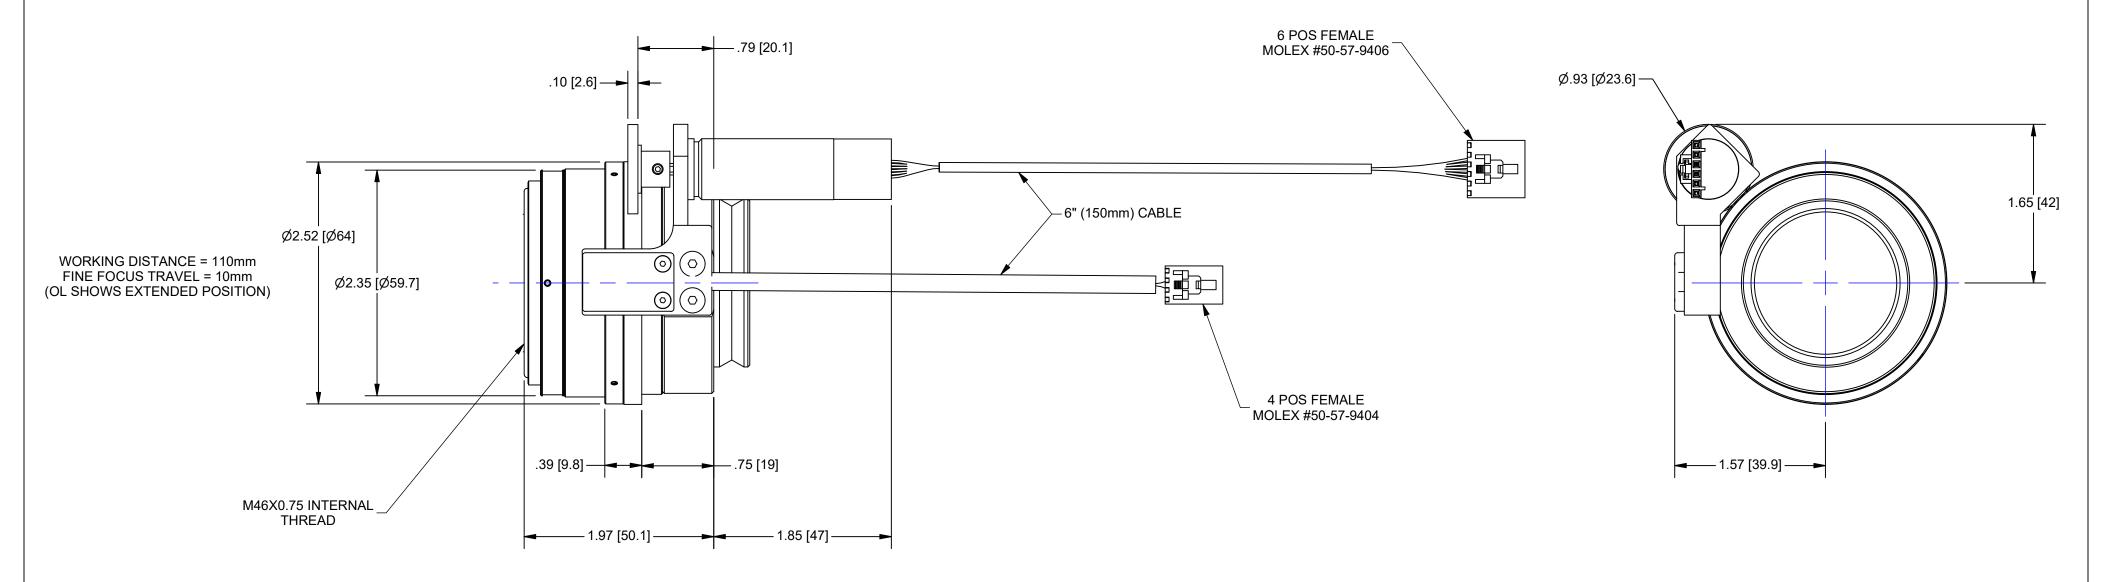

## **ENCODED MOTOR AND HALL EFFECT CABLE INFORMATION:**

FOCUS / HE CABLE LENGTH = 0.15m USE NAVITAR #1-40284 (1.8m), 1-40285 (1.2m), 1-40286 (0.6m) TO CONNECT TO NAVITAR ENCODER CONTROLLERS (1-40237,1-40238, 1-40242)

FF MOTOR 6 POSITION FEMALE CONNECTOR (MOLEX #50-57-9406) HE SENSOR 4 POSITION FEMALE CONNECTOR (MOLEX #50-57-9404)

## **ENCODED FF MOTOR PINOUT**

PIN 1 = +5Vdc (ORANGE) PIN 2 = MOTOR CHAN A (WHITE) PIN 3 = MOTOR CHAN B (BLACK) PIN 4 = MOTOR GROUND (YELLOW)
PIN 5 = MOTOR + (RED)
PIN 6 = MOTOR - (BROWN) **4 PIN HE SENSOR PINOUT** PIN 1 = COMMON PIN 2 = FAR LIMIT PIN 3 = +5vDC PIN 4 = NEAR LIMIT

## OUTLINE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART			
SCALE: 2:1	OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.		ROCHESTER, NEW YORK	
WEIGHT: 0.76 lbmass	0.0 inch 1.0		MTD FF FNO 0.75V LENC	
DR BY: J. WILLIAMSON			MTR FF, ENC, 0.75X, LENS ATTACHMENT	
CH BY: PB	0.0 mm 25.0		7 T T TOT IIVIET T	
PROJECT #: E3576	DO NOT SCALE DRAWING	SIZE	PART NUMBER	REV
DATE DR: 11/29/2017	$\bigcup_{\bigoplus}$	C	1-81203M3	Α
	·		·	