

ELECTRICAL CHARACTERISTICS AT 350mA


OPERATING TEMPERATURE = -40°C-120°C FORWARD VOLTAGE = 2.5-5.0V MAX. JUNCTION TEMPERATURE = 125°C

COLOR TEMPERAURE = 6500K (TYP.)

PLUG INPUT

COMPATIBLE WITH BARREL POWER CABLES WITH CONNECTOR TYPE: 2.1mm ID, 5.5mm OD PLUG CABLE

POWER CABLE INPUT COMPATIBLE WITH 1-40381 CABLE

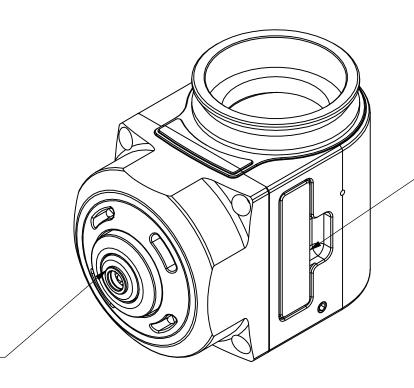

DIFFUSER SLOT

OUTLINE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART	ROCHESTER, NEW YORK		
SCALE: 1:1	OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.		ROCHESTER, NEW YORK	
WEIGHT: 0.23 kg	0.0 inch 1.0			
DR BY: J. WILLIAMSON		RESOLV, ILLUM ASS'Y, COOL WHITE		
CH BY: DEROSA	0.0 mm 25.0			
PROJECT #: E3673	DO NOT SCALE DRAWING	SIZE	PART NUMBER	REV
DATE DR: 5/5/2020	\bigoplus	В	SK-1-81402	1