

CMMR064 | DATASHEET

45° first surface mirror for 100.0 mm clamping diameter optics



KEY ADVANTAGES

Reflect light at 90°.

Ideal for **limited space**.

Easy and secure clamping system.

Compatible with telecentric lenses and illuminators.

Optional **protective windows** available.

CMMR series is the Opto Engineering® answer to tight space integration issues, opening new installation options for your application.



SPECIFICATIONS

Optical specifications

Coating	Aluminium reflective coating, R>90%, bandwidth 430-670 nm	
Deviation angle	(°)	90

Mechanical specifications

Clamping size	(mm)	100.0
Clamping system	lockring	
Working distance difference ¹	(mm)	118.2
Length	(mm)	143.2
Width	(mm)	128.0
Height	(mm)	120.2
Mass	(g)	1336
Protective windows ²	WI064	

¹ Value to be subtracted from the objective or illuminator working distance when the CMBS is used

² To be ordered separately

COMPATIBILITY


This products is compatible with the following lenses:

- TCxx064
- TCxMHR064-x
- TC1xM064-x

This products is compatible with the following illuminators:

- LTCLHP064-x

CMMR SETUP

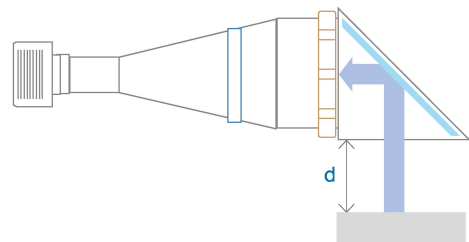

COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.