



# EL5MP2556 | DATASHEET

## 5 MP fixel focal lens with liquid lens technology, focal length 25 mm, f/5.6, C-mount



### SPECIFICATIONS

#### Optical specifications

Focal length	(mm)	25
Magnification <sup>1</sup>	(x)	0.116
Image circle	(mm)	11.0
Max sensor size		2/3"
WD range <sup>2</sup>	(m)	200 - inf
f/N		5.6
Back focal length	(mm)	10.3
Distortion <sup>3</sup>	(%)	< 0.2

#### Liquid lens specifications

Liquid lens model		Optotune EL-3-10
Temperature sensor		Yes
Focal power mode		Yes
Response time	(ms)	1.0
Setting time	(ms)	4.0
Current range	(mA)	-120 to +120
Lifecycles (10%-90% sinusoidal)		>1,000,000,000
Connector		HR10A-7R-6PB

#### Mechanical specifications

Mount		C
Filter thread		M27 x 0.5
Length <sup>4</sup>	(mm)	21.0
Outer Diameter	(mm)	30.0
Mass	(g)	48.0

### KEY ADVANTAGES

#### Precise and quick autofocus

Electronically driven liquid lenses allow for extremely fast and precise changes of focus

#### Easy installation

Optotune<sup>®</sup> liquid lenses are integrated in the optics for a ready-to-use solution

#### Excellent accuracy

High repeatability enhanced by a precise thermal calibration algorithm

#### Robust design

Lifetime guaranteed for over 1 billion cycles

The **EL5MP series** are 5 MP fixed focal length optics for sensors up to 2/3" with integrated Optotune<sup>®</sup> liquid lens technology.

### Environment

Operating temperature	(°C)	0-40
Storage temperature	(°C)	0-50
Operating relative humidity	(%)	20-85, non condensing
Installation		Indoor use only

<sup>1</sup> Calculated at minimum working distance

<sup>2</sup> Working distance: distance between the front end of the mechanics and the object

<sup>3</sup> Percent deviation of the real image compared to an ideal, undistorted image

<sup>4</sup> Measured from the front end of the mechanics to the camera flange at infinite focusing

### ANGLE OF VIEW

Sensors	Diagonal (°)
1/3" (4.8 x 3.6 mm x mm)	13.2
1/2" (6.4 x 4.8 mm x mm)	19.5
2/3" (8.5 x 7.1 mm x mm)	24.0

### FIELD OF VIEW AT MINIMUM WORKING DISTANCE

Sensors	(mm x mm)
1/3" (4.8 x 3.6 mm x mm)	41.4 x 31.0
1/2" (6.4 x 4.8 mm x mm)	61.5 x 45.9
2/3" (8.5 x 7.1 mm x mm)	73.3 x 61.1

### COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).




All product specifications and data are subject to change without notice to improve reliability, for the latest, visit [www.opto-e.com](#). Data are reported by design, actual lens performance may vary due to manufacturing tolerances.

**COMPATIBLE CONTROLLER**

The liquid lens must be controlled by a suitable lens driver. Hirose cables and Liquid Lens driver are sold separately. Only the following part numbers are considered fully compatible with EL5MP2556:

- **CBGPIO6PMF-3M**, 6 Pin Hirose Male - Female moulded connector cable, 3 m.
- **RT-EL-E-4i**, USB Controllers for liquid lens modules, industrial version.

**CONNECTOR PINOUT**





Pin	Description
1	Control current +
2	Control current -
3	GND
4	Power
5	I <sup>2</sup> C SCL
6	I <sup>2</sup> C SDA



**ATTENTION:** observe precaution for handling.  
Electrostatic sensitive device

**IMAGE RESOLUTION AT 1 M WORKING DISTANCE**


**IMAGE RESOLUTION AT MINIMUM WORKING DISTANCE**

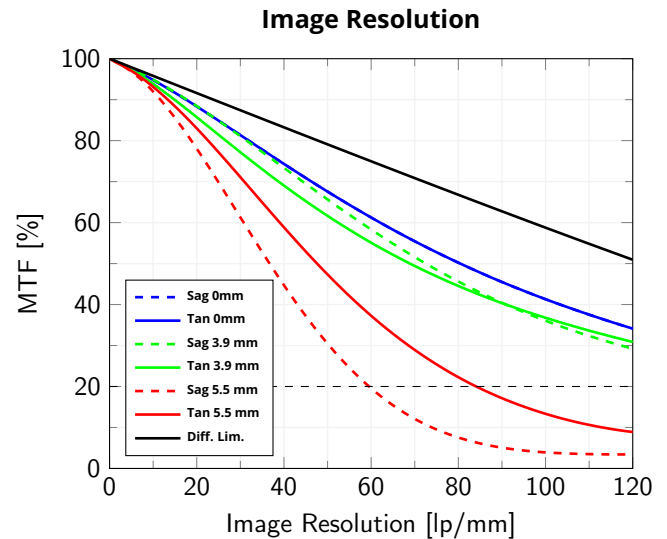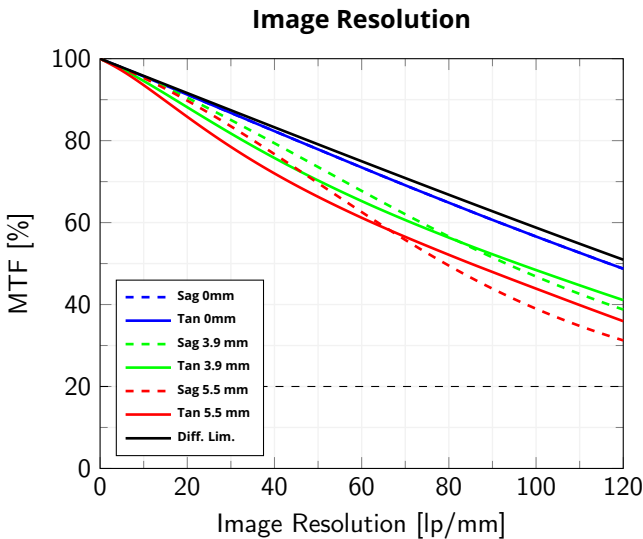

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at 1 m working distance

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at minimum working distance

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.

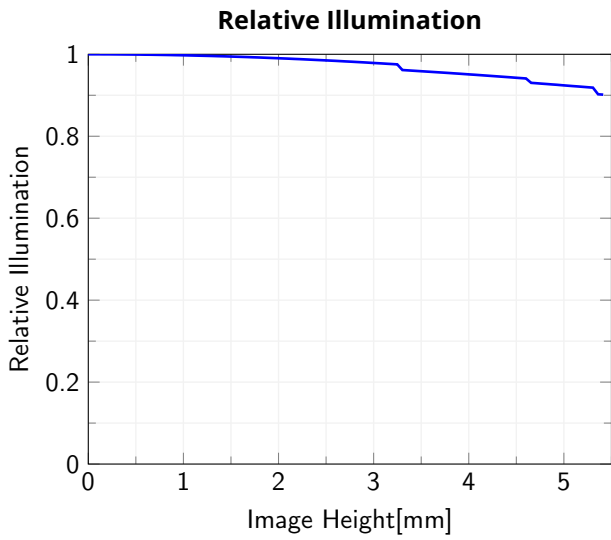

Relative illumination vs. Image Field Height, from the optical axis to the maximum image height at maximum aperture



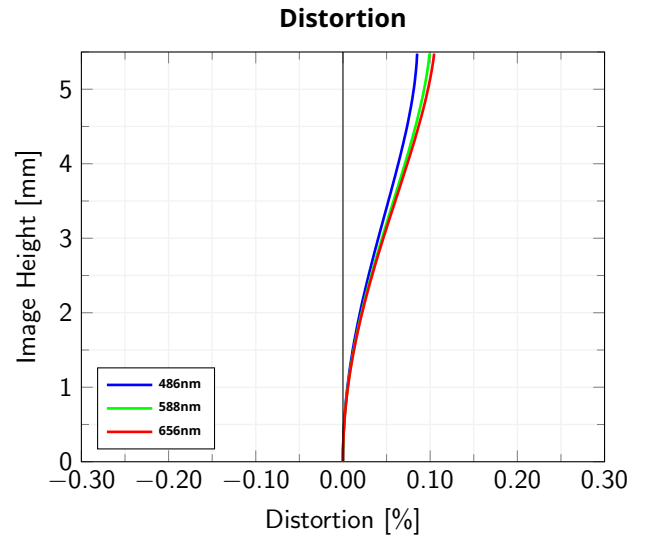


Image Field Height vs. Distortion, from the optical axis to the maximum image height

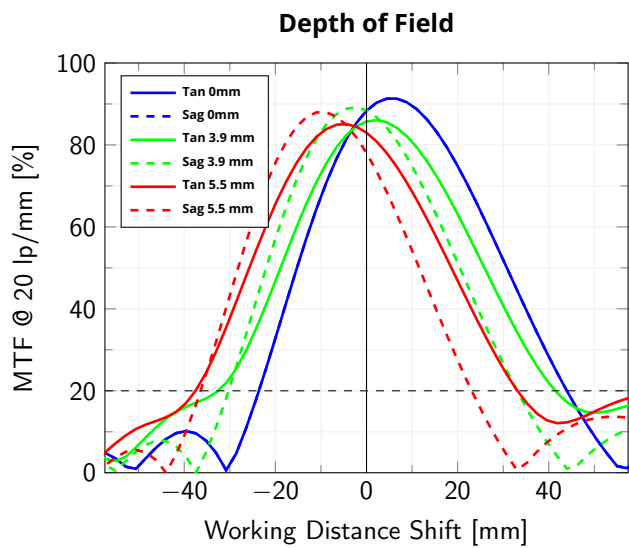

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus at minimum working distance, wavelength range 486 nm - 656 nm

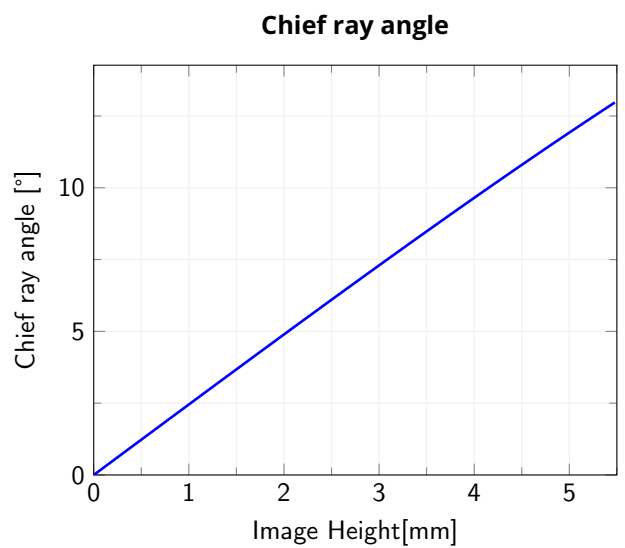

Chief ray angle vs. Image Field Height, from the optical axis to the maximum image height at maximum aperture

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.