



# EN10MPL2520 | DATASHEET

10 Megapixel high resolution fixed focal lens for 1" sensors, focal length 25 mm, f/N 2.0 - 22, C-mount



## SPECIFICATIONS

### Optical specifications

Focal length	(mm)	25
Magnification <sup>1</sup>	(x)	0.148
Image circle	(mm)	23.0
Max sensor size		4/3"
WD range <sup>2</sup>	(m)	0.15 - inf
f/N		2.0 - 22
Back focal length	(mm)	22.43
Distortion on 2/3" <sup>3</sup>	(%)	0.28
Distortion on 1" <sup>3</sup>	(%)	0.50
Distortion on 4/3" <sup>3</sup>	(%)	0.66
Iris control		Manual
Focus Control		Manual

### Mechanical specifications

Mount		C
Filter thread		M46 x 0.75
Length <sup>4</sup>	(mm)	82.7
Outer Diameter	(mm)	48.0
Mass	(g)	251

### Environment

Operating temperature range	(°C)	-10+50
-----------------------------	------	--------

- <sup>1</sup> Calculated at minimum working distance
- <sup>2</sup> Working distance: distance between the front end of the mechanics and the object
- <sup>3</sup> Percent deviation of the real image compared to an ideal, undistorted image
- <sup>4</sup> Measured from the front end of the mechanics to the camera flange at infinite focusing

## KEY ADVANTAGES

**Designed for the new high resolution Sony Pregius sensors**  
 Suitable with the Sony Pregius 12mp IMX304 and IMX253 sensors with 1.1" format, and the new Sony Pregius 7.1mp IMX420 and IMX428 with 1.1" format.

**High quality / price ratio**  
 High performance with reasonable cost.

**Low distortion**  
 Even down to 0.14 %.

**EN10MP Series** is a series of powerful fixed focal length lenses designed for the high sensitivity and precise high-speed imaging of the new 1.1" and 4/3" Sony Pregius sensors.

## ANGLE OF VIEW

Sensors	Diagonal (°)
2/3" (8.5 x 7.1 mm x mm)	24.9
1" (12.44 x 9.83 mm x mm)	35.7
4/3" (18.93 x 10.61 mm x mm)	49.7

## FIELD OF VIEW AT MINIMUM WORKING DISTANCE

Sensors	(mm x mm)
2/3" (8.5 x 7.1 mm x mm)	57.47 x 47.94
1" (12.44 x 9.83 mm x mm)	84.11 x 66.46
4/3" (18.93 x 10.61 mm x mm)	127.99 x 71.74

## COMPATIBLE PRODUCTS


Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.


DATA AT INFINITE WORKING DISTANCE

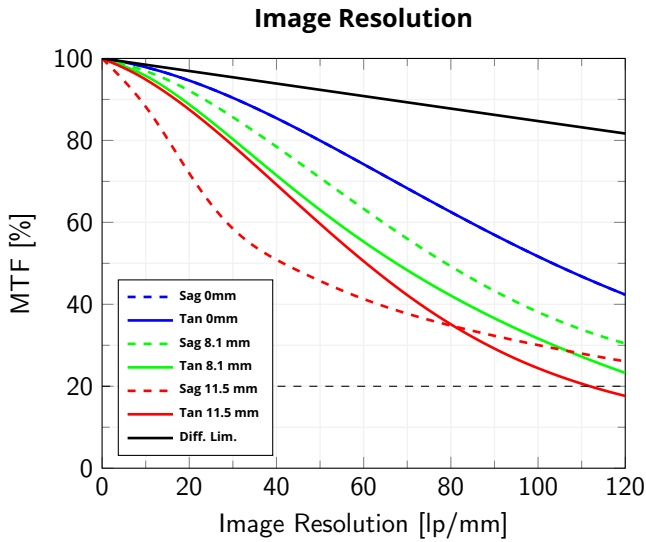

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at infinite working distance and maximum aperture

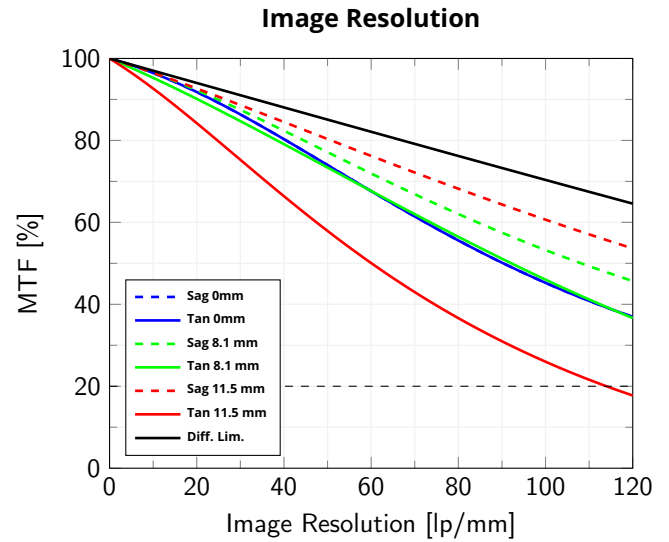

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at infinite working distance at  $f/4$

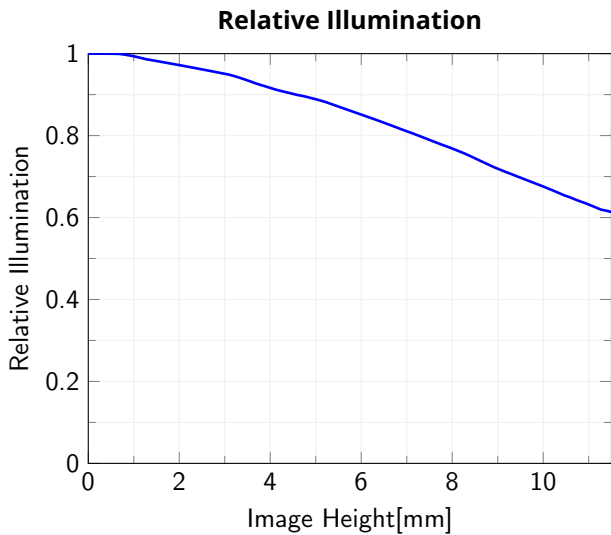

Relative illumination vs. Image Field Height, from the optical axis to the maximum image height at maximum aperture


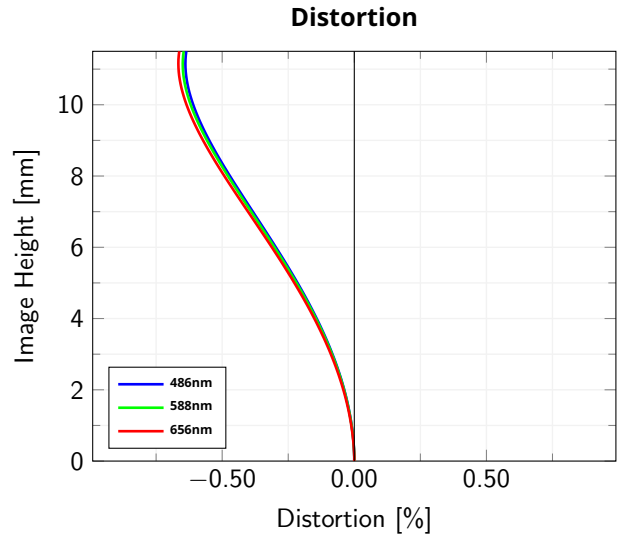



Image Field Height vs. Distortion, from the optical axis to the maximum image height

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.


DATA AT MINIMUM WORKING DISTANCE

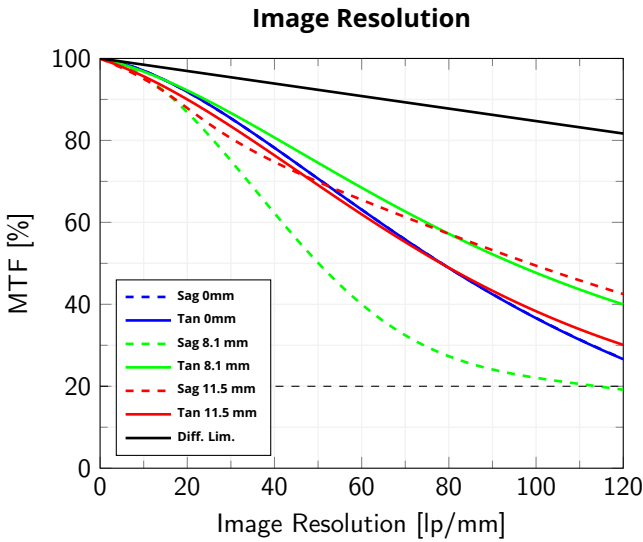


Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at minimum working distance and maximum aperture

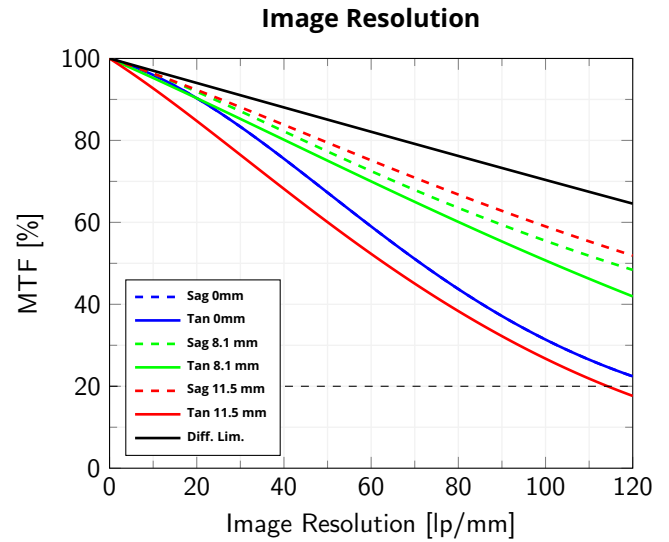

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at minimum working distance at  $f/4$

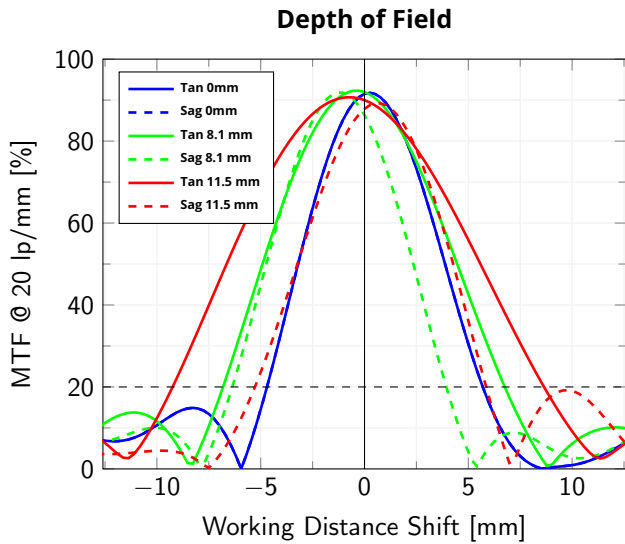

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus at minimum working distance, wavelength range 486 nm - 656 nm, maximum aperture

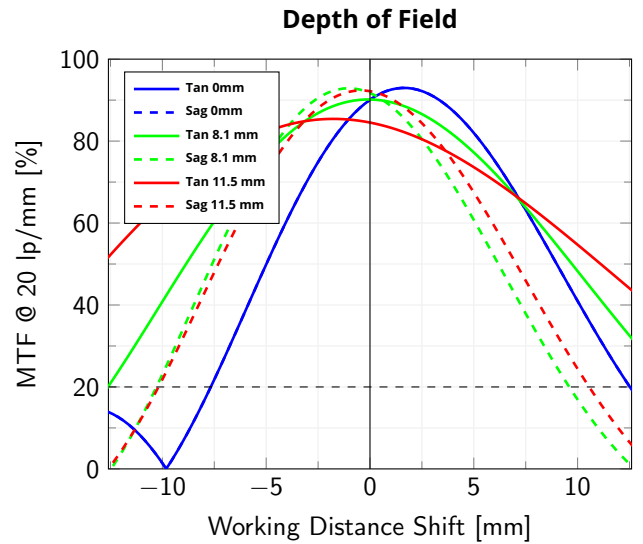

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus at minimum working distance, wavelength range 486 nm - 656 nm,  $f/4$

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.