

LTSCHP1W-W | DATASHEET

Replacement LED module, white



LTSCHP modules power several Opto Engineering® LED illuminators and feature excellent current stability. They are available in various colors and can be ordered as spare parts.



SPECIFICATIONS

Lighting specifications

Light color, Peak wavelength		white, 6000 K
Spectral FWHM	(nm)	-
Diffusive diameter	(mm)	-

Electrical specifications

Supply voltage ¹	(V)	12-24
Power consumption	(W)	2.5
Led forward voltage typical (max) ²	(V)	2.8 (-)
Max led forward current ³	(mA)	350
Max pulse current ⁴	(mA)	2000
Connector		M8
Included cable		CB244P1500

Mechanical specifications

Diameter	(mm)	38.5
Length	(mm)	46.1

¹ Tolerance $\pm 10\%$

 $^{\rm 2}$ At max forward current. Tolerance is \pm 0.06V on forward voltage measurements

³ In continuous mode (not pulsed)

 4 At pulse width \le 10 ms and duty cycle \le 10%. Built-in electronics board must be bypassed (see tech info)

Environment

Operating temperature	(°C)	0-40
Storage temperature	(°C)	0-50
Operating relative humidity	(%)	20-85, non condensing
Installation		Indoor use only

Risk group 1

Eye safety

Risk group (CEI EN 62471:2010)

COMPATIBILITY

This products is compatible with:

- LTCLHP
- TCBENCH
- LTCL4K
- тссх
- тссхо
- LTCLHP CORE
- TCBENCH CORE
- TCKIT

COMPATIBLE PRODUCTS

Full list of compatible products available here.




A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.


LTSCHP1W-W | DATASHEET

CONNECTOR PINOUT



Pin	Function	Cable color
1	Earth	Yellow/Green
2	Ground	Black
3	Anode	Blue
4	Power supply (+12/24 V)	Brown

Device side

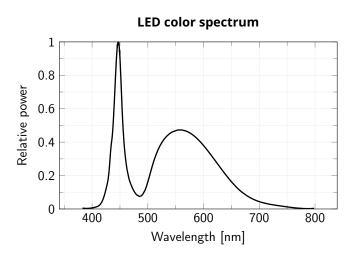

Forward Current Characteristics

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.