


TCSE10M009-J | DATASHEET

High-resolution telecentric lenses for 4/3", APS-C, APS-H and full frame sensors

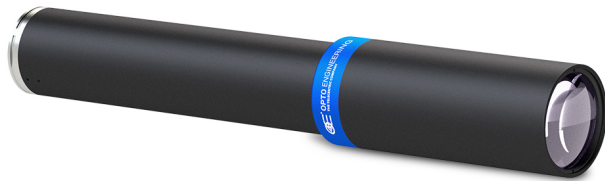

KEY ADVANTAGES

Wide image circle for sensors up to 45.7 mm.

Excellent resolution and low distortion for accurate measurements.

Long working distance perfect for the inspection of electronic components.

Robust design ideal for industrial environments.

Detailed **test report** with **certified** optical parameters.

TCSE series series features very high-resolution telecentric lenses designed for various large sensor formats up to full frame. TCSE lenses offer excellent optical performance ensuring unmatched resolution and low distortion.

SPECIFICATIONS

Optical specifications

Magnification		2.750
Image circle	(mm)	28.2
Max sensor size		APS-C
Working distance ¹	(mm)	178
Wavelength range	(nm)	400-700
wf/N^2		11.5
Telecentricity typical (max) ³	(°)	<0.06 (0.08)
Distortion typical (max) ⁴	(%)	<0.06 (0.08)
Field depth ⁵	(mm)	0.08
Resolution (max) ⁶	(μ m)	3

Mechanical specifications

Mount ⁷		M42x1 FD 12
Phase adjustment ⁸		Yes
Length ⁹	(mm)	381.5
Front diameter	(mm)	61.0
Mass	(g)	1623

ADDITIONAL NOTE

This lens works only with a 50 mm cube beamsplitter in front of the objective.

FIELD OF VIEW

Sensors	(mm x mm)
4/3" (15.29 x 15.30 mm x mm)	5.56 x 5.56
APS" (22.36 x 16.77 mm x mm)	8.13 x 6.10
CHR70M" (31.00 x 21.99 mm x mm)	$\varnothing = 8.00$
CMV50000" (36.43 x 27.62 mm x mm)	$\varnothing = 10.04$

¹ Working distance: distance between the front end of the mechanics and the object. Set this distance within $\pm 3\%$ of the nominal value for maximum resolution and minimum distortion.

² Working f/N : the real f/N of a lens in operating conditions.

³ Maximum angle between chief rays and optical axis on the object side. Typical (average production) values and maximum (guaranteed) values are listed.

⁴ Percent deviation of the real image compared to an ideal, undistorted image. Typical (average production) values and maximum (guaranteed) values are listed.

⁵ At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 3.45 μ m.

⁶ Object side, calculated with the Rayleigh criterion with $\lambda = 520$ nm

⁷ FD stands for Flange Distance (in mm), defined as the distance from the mounting flange to the camera detector plane.

⁸ Indicates the availability of an integrated camera phase adjustment feature.


⁹ Measured from the front end of the mechanics to the camera flange.

COMPATIBLE PRODUCTS


Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.

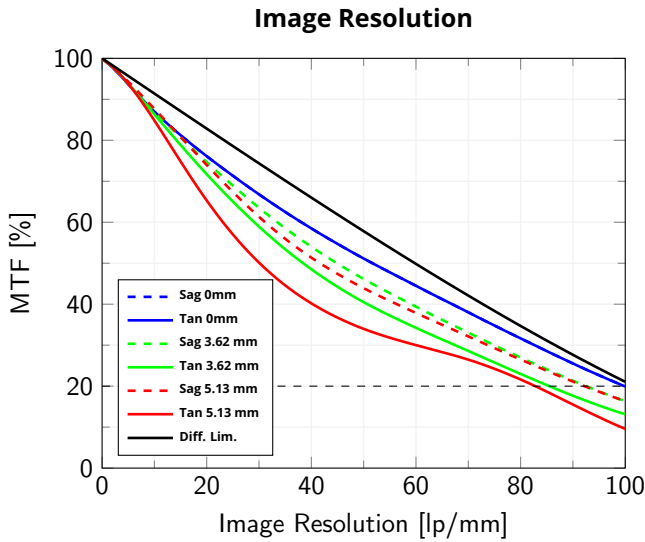


Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 400-700 nm, $wf/N = 11.5$

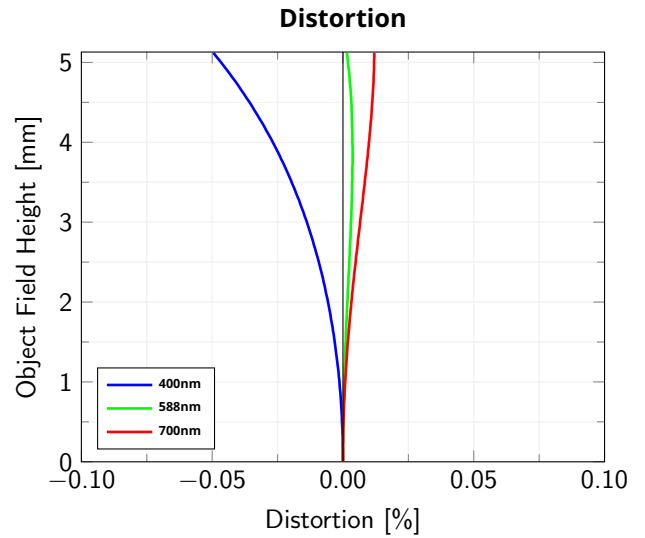

Object Field Height vs. Distortion, from the optical axis to the corner of the field of view, $wf/N = 11.5$

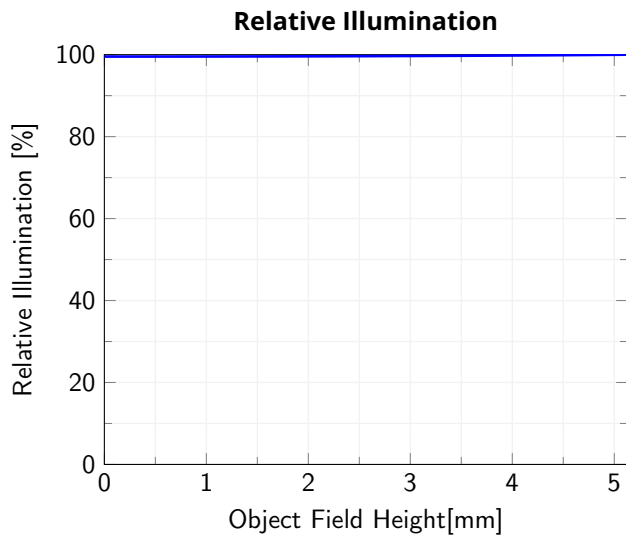

Relative illumination vs. Object Field Height, from the optical axis to the corner of the field of view, $wf/N = 11.5$

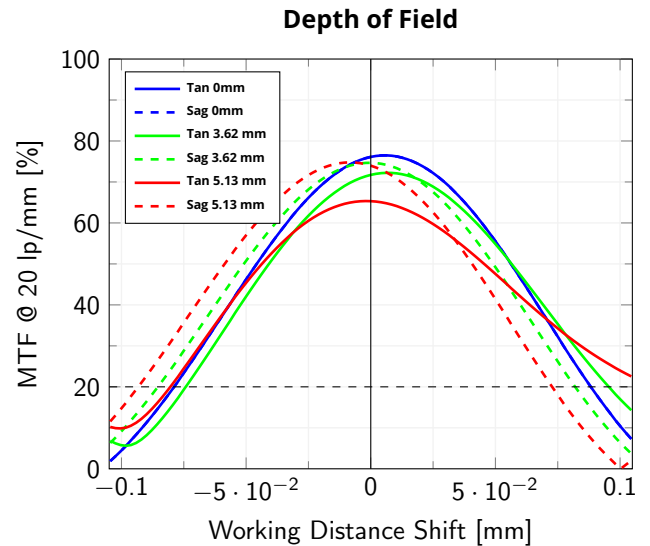

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus Working Distance, wavelength range 400-700 nm, $wf/N = 11.5$