

1 2 3 4 5 6 7 8

D

C

B

A

D

C

B

A

back focal adjustment locking

lock screw


Tilt screw

C-Mount phase control screw

$\phi 25,40$
C-Mount
1/32 TPI

M3 holding holes

20
20,33

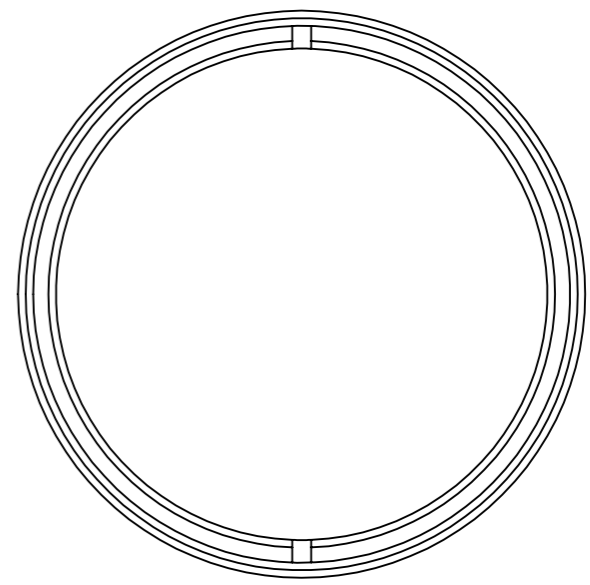

205
181,6

M3 holding holes

20

$\phi 75 h8 -0,046$
Clamping Diameter

1,730
From lens to chassis edge

$\phi 37,80 h8 -0,04$
Clamping Diameter

Material	N.A.			Mass	712g	Scale	1:1		
Surface treatment	N.A.			Project-Prod.item/Instrument TCSM048					
Geometrical tolerance (ISO 2768-2)			Class	K	Description Scheimpflug Mount TC lens				
Linear tolerance (ISO 2768-2)			Class	m				Undimensioned bevels	0.5x45°
0.5 ±3	>3± 6	>6± 30	>30± 120	>120 ±400				>400± 1000	>1000 ±2000
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2		
Undimensioned radii			R 0.5		Undimensioned radii				
		Date	Name	Drawing No.		Sheet			
		Designed	16/12/10	19601-4-A		4/8			
		Draw	16/12/10						
		Checked	X	Reproduction forbidden without specific authorization					
OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 29/2 - Tel. +39 0376 263525 - e-mail: info@opto-engineering.com - http://www.opto-engineering.com									

1 2 3 4 5 6 7 8

0 1 2 3 4 5 6 7 8 9 10