


| REVISIONS | | |
|---|------------|----------|
| DESCRIPTION | DATE | APPROVED |
| INITIAL RELEASE | 7/18/2014 | |
| CREWS; CHANGED FASTENERS TO TERED POWER CABLE; REPLACED EW MATERIAL; REDUCED GASKET SIZE TO ELIMINATE BULGING. | 12/22/2014 | |
| E #222 THREADLOCKER AND PRIMER 9 TO BOM- SEE SHEET 2. | 12/24/2014 | |
| ANGED LOCTITE TO #290 | 12/24/2014 | |
| RRECTED ACTIVE DIMS | 7/21/2017 | |
| SPECIFICATIONS UPDATED | 2/14/2018 | |
| ED GASKET ADHESIVE NOTE | 2/18/2018 | |



| | Metaphase Technologies, Inc. 211 Sinclair Road, Suite Bristol, PA. 19007 215-639-8699 Fax 215-639-097 | | | | | | | |
|---|--|-----------------|-----------------|-----------|---|---|--|--|
| | TOLERANCE/FINISH UNLESS OTHERWISE SPECIFIED | | | | THIS DOCUMENT IS THE PR METAPHASE TECHNOLOGI | | | |
| | INCHES[MM] 125 | | | | 125√ RMS | LOAN IT. SUBJECT TO RETU | | |
| | Х | .Χ | .XX | .XXX | [RA3.2um] | IT INCLUDES CONFIDENTIA INFORMATION WHICH MAY TO ANY THIRD PARTY, AND | | |
| | [±.76] | ±.030 [±.25] | ±.010 [±.13] | ±.005 | ANGLES ±1° | | | |
| | FLAT PATTERNS USE 0.5 K FACTOR FOR DESIGN REFERENCE ONLY. ACTUAL VALUE MAY VARY, USE TEST PART AS REQ'D TO VERIFY ACCURACY | | | | | ANY PURPOSE CONTRARY | | |
| | | | | | | USE, WITHOUT THE EXPRE CONSENT OF METAPHASE | | |
| _ | USE TEST | I ANI AS | | V LKIFT / | ACCORACT | | | |

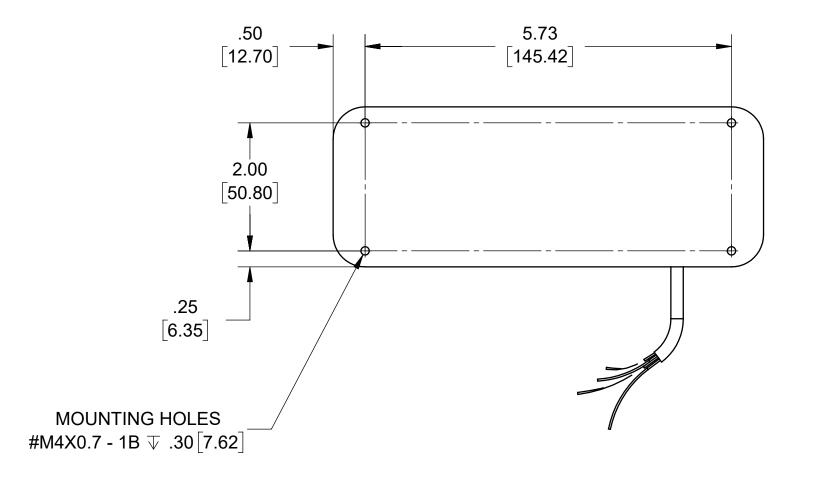