


MALE  
9 PIN D-SUB

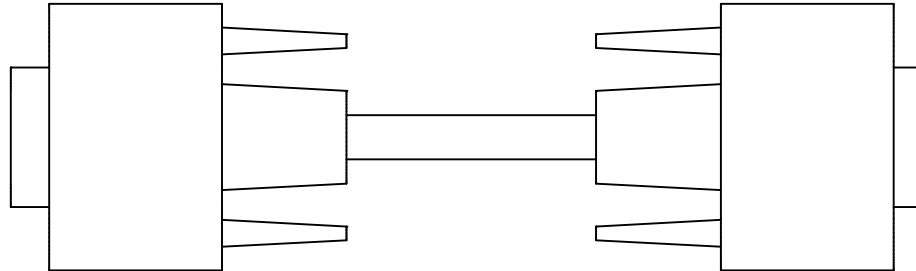

FEMALE  
9 PIN D-SUB

# OUTLINE

USED ON:

MATERIAL:

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND  
INCLUDE CHEMICALLY APPLIED  
OR PLATED FINISHES

TOLERANCES AS FOLLOWS

DEC. .XXX ± .005  
DEC. .XX ± .010  
FRACT. ± 1/64  
ANGLES ± 30'  
CONCENTRICITY .003 TIR

BREAK ALL SHARP EDGES  
.005 MIN. .010 MAX.

MAX. SURF. ROUGHNESS:  $\sqrt{32}$

P/N SUFFIX DEFINITION

- 1 CONVERSION COATING
- 2 PAINTING
- 3 MARKING
- R REWORK

SCALE: NOT TO SCALE

DR: DJM


CH: PB

APP: PB

DATE DR: 6/23/2004

DO NOT SCALE DRAWING

THE CONTENTS OF THIS  
DOCUMENT ARE PROPRIETARY  
TO NAVITAR, ITS USE IS  
AUTHORIZED ONLY FOR  
RESPONDING TO REQUEST FOR  
QUOTATION OR PERFORMANCE  
OF WORK FOR NAVITAR



6 FOOT RS-232 CABLE

SIZE

A

8-62502\_OL

SHEET 1 OF 1

REV

A

CHAMFER ALL THREADS 30°  
TO ROOT DIAMETER