



1:1

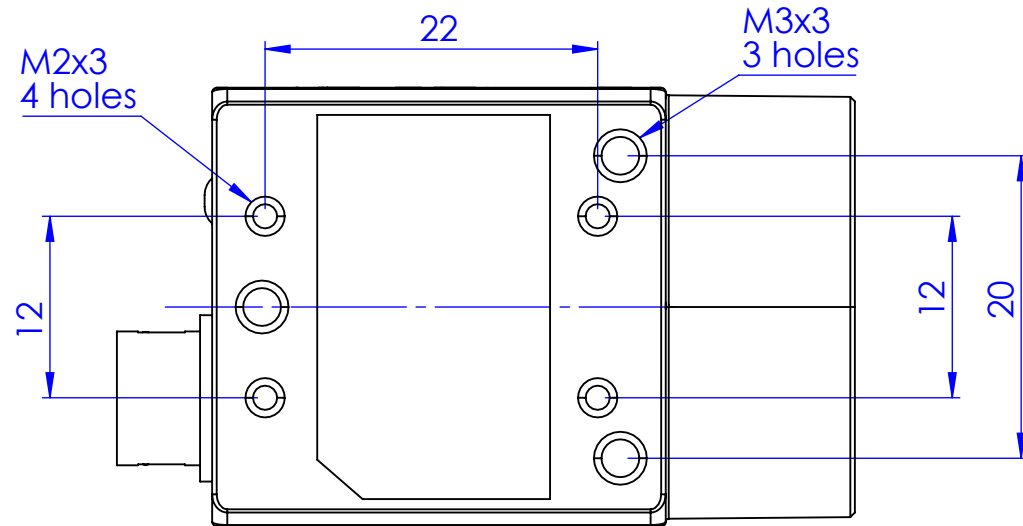



M2x3
4 holes

M3x3
3 holes

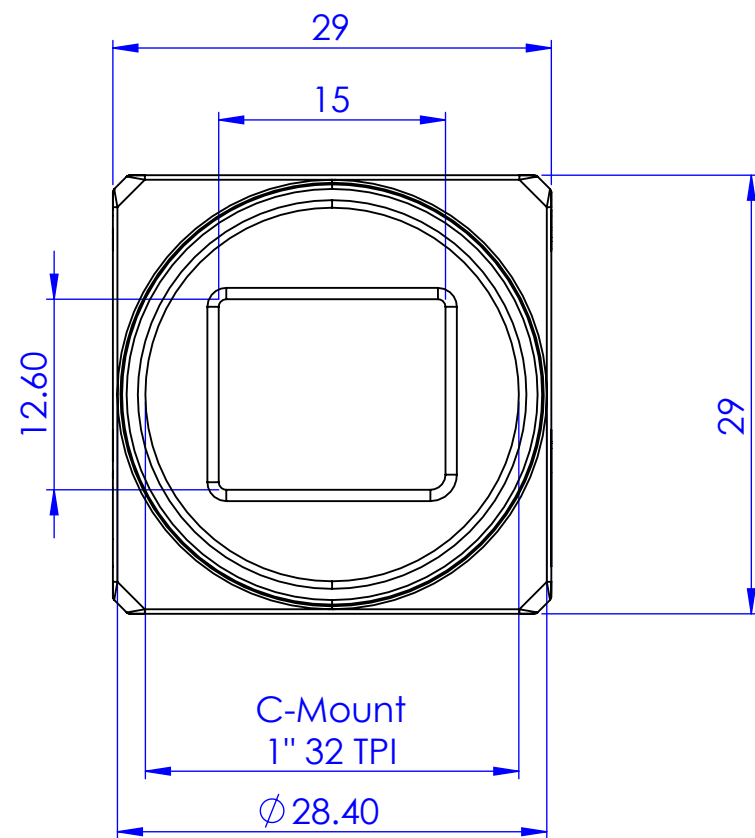

C-Mount
1" 32 TPI









Ø 28.40

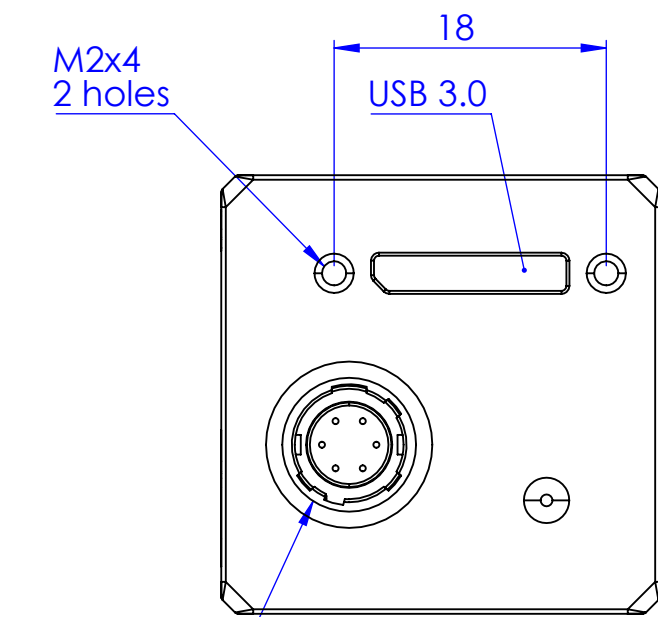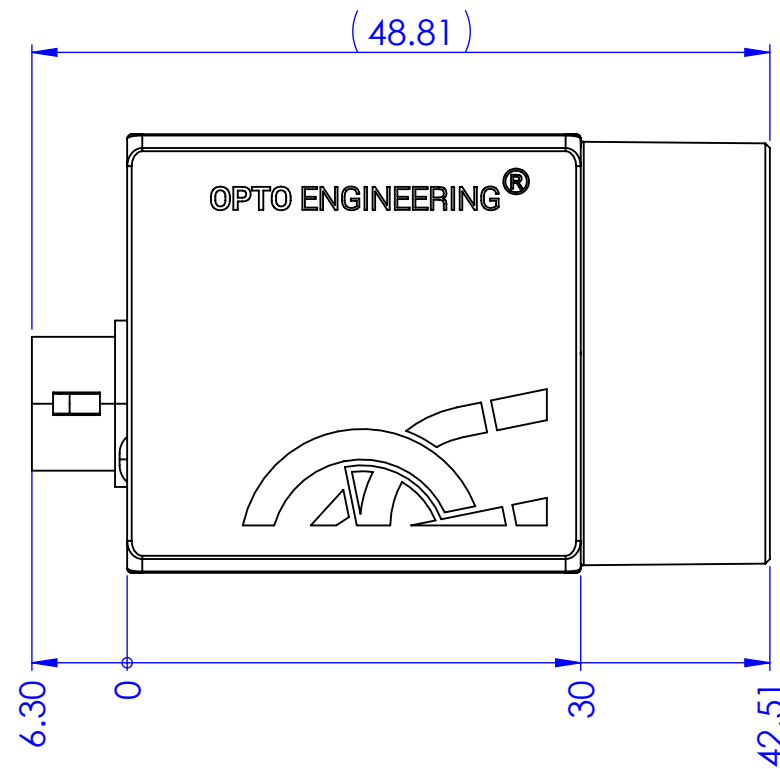

M2x4
2 holes

USB 3.0

GPIO
connector

Material		Surface treatment		Geometrical tolerance (ISO 2768-2)		Class		K		Undimensioned bevels		0.5x45°		Description	
N.A.		N.A.		Linear tolerance (ISO 2768-2)		Class		m		Undimensioned radii		R 0.5		COE-XXX-Y-USB-TYPE 1	
Mass 56 g		Scale 2:1		0.5 ±3		>3± 6		>6± 30		>30± 120		>120 ±400		>400± 1000	
Part No. CO28944		Drawing No. DP 28944-B		±2000 ±4000		±1.2		±2		Date		Name		Sheet	
Designed 12/04/2019		Drawn 12/04/2019		Checked 16/04/2019		Date		Name		Rodella		Rodella		1/1	
															
OPTO ENGINEERING S.r.l. - Mantova, Italy - Tel. +39 0376699111 - www.opto-e.com		Secret and confidential - All rights reserved - No copy, dissemination or circulation is allowed unless specifically authorized in writing by OPTO ENGINEERING S.r.l. - Any violation shall be legally prosecuted.													

all dimensions are in mm