



TCCR4M064-E

Telecentric CORE lens for 4/3" detectors, magnification 0.275 x, M42x1 FD=16

SPECIFICATIONS

Part number		TCCR4M064-E
Magnification	(x)	0.275
Image shape dimension (8)	(\emptyset , x mm)	$\emptyset=22.6$, x=18.7
Phase adjustment (7)		Yes

Object field of view 7

with IMX174/IMX249 13.3 mm diag w x h 11.35 x 7.13	(mm x mm)	41.1 x 25.8
with KAI-2020 14.8 mm diagonal w x h 11.84 x 8.88	(mm x mm)	43.1 x 32.3
with IMX253/IMX304 17.6 mm diag w x h 14.16 x 10.37	(mm x mm)	51.6 x 37.8
with KAI-4022/4021 21.5 mm diagonal w x h 15.2 x 15.2	(mm x mm)	55.3 x 55.3
with KAI-08050 22.6 mm diagonal w x h 18.1 x 13.6	(mm x mm)	65.8 x 49.5

Optical specifications

Working distance (1)	(mm)	181.9
wF/# (2)		16
Telecentricity typical (max) (3)	(deg)	< 0.05 (0.10)
Distortion typical (max) (4)	(%)	< 0.04 (0.10)
Field depth (5)	(mm)	17.5
CTF@ 50 lp/mm	(%)	> 40

Mechanical specifications

Mount (6)		M42x1 FD16.00
A	(mm)	101
B	(mm)	127
C	(mm)	211
Mass	(g)	2142

Compatibility

LTCLCR064-x, CMHOCR064, CMPTCR064, LTCLHP064-x

Last update: 2019-06-17

NOTES

- Working distance: distance between the front end of the mechanics and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
- Working F-number (wF/#): the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
- Maximum slope of chief rays inside the lens: when converted to milliradians, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
- Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
- At the borders of the field depth the image can be still used for measurement but, to get a perfectly sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 5.5 μ m.
- In case the of vignetting, FOV dimensions are indicated with " \emptyset = , x = ", where " \emptyset =" stands for diameter and "x=" indicates the nominal FOV height and length (see [Tech Info](#) for related drawing).
- Indicates the availability of an integrated camera phase adjustment feature.
- Indicates the dimensions and shape of image, where " \emptyset =" stands for diameter and "x=" indicates the nominal image height and length (see [Tech Info](#) for related drawing)

COMPATIBLE PRODUCTS

Despite the efforts made to generate an error-free compatibility list, we always recommend to consult the Opto Engineering® technical support department before purchasing a compatible product. Opto Engineering® shall not be liable for any damage or malfunctioning caused by the incorrect selection of a compatible product.

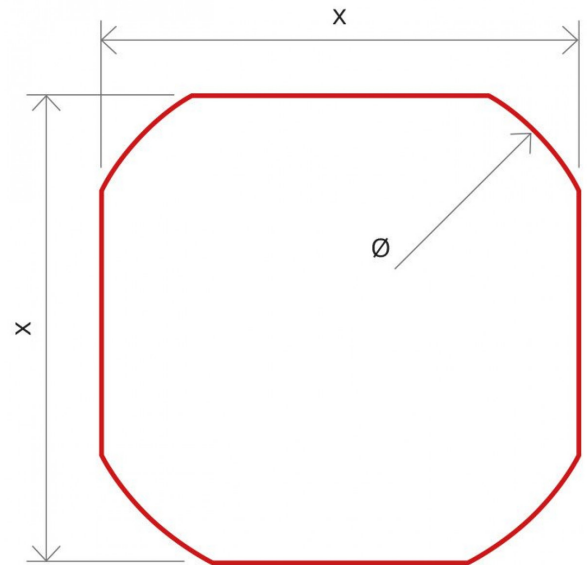


Image shape dimensions (\emptyset , x)

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only.



LTCLHP series

High-performance telecentric illuminators

LTCLHP064-R	Telecentric HP illuminator, beam diameter 80 mm, red
LTCLHP064-G	Telecentric HP illuminator, beam diameter 80 mm, green
LTCLHP064-B	Telecentric HP illuminator, beam diameter 80 mm, blue
LTCLHP064-W	Telecentric HP illuminator, beam diameter 80 mm, white



LTCLHP CORE series

Ultra compact telecentric illuminators

LTCLCR064-R	Telecentric CORE illuminator, beam dimensions $\varnothing = 86$; x = 67, red
LTCLCR064-G	Telecentric CORE illuminator, beam dimensions $\varnothing = 86$; x = 67, green
LTCLCR064-W	Telecentric CORE illuminator, beam dimensions $\varnothing = 86$; x = 67, white



LTBC series

Continuous LED backlight

LTBC114114-W	Continuous LED backlight, 114x114 illumination area, white
LTBC114114-G	Continuous LED backlight, 114x114 illumination area, green



CMHOCR series

Clamping mechanics CORE series

CMHOCR064	Clamping mechanics for CORE telecentric lenses and illuminators TCCRxx64 and LTCLCR064-x
-----------	--



CMPTCR series

CORE series mounting plates

CMPTCR064	Mechanical components designed for CORE telecentric lenses and illuminators $\varnothing 64$ mm
-----------	---



CMT series

Precision alignment mechanics

CMTHCR064	Precision alignment mechanics for CORE telecentric optics 064
-----------	---



mvBlueFOX3-2 series

USB3 vision camera with Sony Pregius CMOS sensors

RT-mvBF3-2089a	USB3 Vision camera with Sony Pregius CMOS sensor IMX267
RT-mvBF3-2089	USB3 Vision camera with Sony Pregius CMOS sensor IMX255
RT-mvBF3-2124a	USB3 Vision camera with Sony Pregius CMOS sensor IMX304
RT-mvBF3-2124	USB3 Vision camera with Sony Pregius CMOS sensor IMX253



mvBlueCOUGAR series

GigE & Dual GigE Vision cameras

RT-mvBC-X109b	Camera with interface GigE (1GB/s), sensor size 1", mpixel 8.95, resolution 4112 x 2176, sensor name IMX267, sensor type CMOS
RT-mvBC-XD109b	Camera with interface Dual GigE (2GB/s), sensor size 1", mpixel 8.95, resolution 4112 X 2176, sensor name IMX267, sensor type CMOS
RT-mvBC-X1012b	Camera with interface GigE (1GB/s), sensor size 1.1", mpixel 12.37, resolution 4112 x 3008, sensor name IMX304, sensor type CMOS
RT-mvBC-XD107	Camera with interface Dual GigE (2GB/s), sensor size 1.1", mpixel 7.1, resolution 3216 x 2208, sensor name IMX420, sensor type CMOS
RT-mvBC-XD1012b	Camera with interface Dual GigE (2GB/s), sensor size 1.1", mpixel 12.37, resolution 4112 x 3008, sensor name IMX304, sensor type CMOS



TCLIB Suite

Software library & stand-alone tools for the optimization of telecentric setups

TCLIB-01 Software library & stand-alone tools for the optimization of telecentric setups



COE HR AS-X series

20MP, 26MP and 29MP area scan cameras for high-speed applications

[COE-200-M-POE-070-IR-C](#) HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Gray, GigE, 6 fps, POE, C - mount, Glass filter

[COE-200-C-POE-070-IR-C](#) HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Color, GigE, 6 fps, POE, C - mount, Infrared cut filter

[COE-200-M-USB-070-IR-C](#) HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Gray, 14 fps, C - mount, Glass filter

[COE-200-C-USB-070-IR-C](#) HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Color, 14 fps, C - mount, Infrared cut filter
