

# TC2MHR240-E

High resolution telecentric lens for 1" detectors, magnification 0.053x, mount M42X1 FD=16

## SPECIFICATIONS

Magnification	(x)	0.053
Image circle Ø	(mm)	16.2

Object field of view <sup>8</sup>	(mm x mm or Ø)
with IMX174/IMX249 13.3 mm diag w x h 11.35 x 7.13	214.06 x 134.45
with IMX255/IMX267 16.1 mm diag w x h 14.19 x 7.51	267.74 x 141.70
with IMX253/IMX304 17.6 mm diag w x h 14.16 x 10.37	Ø = 195.68
with KAI-4022/4021 21.5 mm diagonal w x h 15.2 x 15.2	Ø = 285.94
with KAI-08050 22.6 mm diagonal w x h 18.1 x 13.6 <sup>(7)</sup>	Ø = 256.53

## Optical specifications

Working distance <sup>(1)</sup>	(mm)	492.9
wF/# <sup>(2)</sup>		16
Telecentricity typical (max) <sup>(3)</sup>	(deg)	<0.05 (0.10)
Distortion typical (max) <sup>(4)</sup>	(%)	<0.04 (0.10)
Field depth <sup>(5)</sup>	(mm)	427.2
CTF@ 50 lp/mm	(%)	> 40

## Mechanical specifications

Mount		M42x1 FD16.00
Phase adjustment <sup>(9)</sup>		Yes
Length <sup>(6)</sup>	(mm)	813.7
Diameter	(mm)	322
Mass	(g)	18455

Last update: 2019-06-17

## NOTES

- Working distance: distance between the front end of the mechanics and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
- Working F-number (wF/#): the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
- Maximum slope of chief rays inside the lens: when converted to milliradians, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
- Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
- At the borders of the field depth the image can be still used for measurement but, to get a perfectly sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 5 µm.
- Measured from the front end of the mechanics to the camera flange.
- With KAI-08050 (22.6 mm diagonal) detectors, the FOV of TC4MHRyyy-x lenses may show some vignetting at the image corners.
- For the fields with the indication "Ø =", the image of a circular object of such diameter is fully inscribed into the detector.

## COMPATIBLE PRODUCTS


Despite the efforts made to generate an error-free compatibility list, we always recommend to consult the Opto Engineering® technical support department before purchasing a compatible product. Opto Engineering® shall not be liable for any damage or malfunctioning caused by the incorrect selection of a compatible product.



LTCLHP series

High-performance telecentric illuminators

LTCLHP240-R	Telecentric HP illuminator, beam diameter 300 mm, red
LTCLHP240-G	Telecentric HP illuminator, beam diameter 300 mm, green

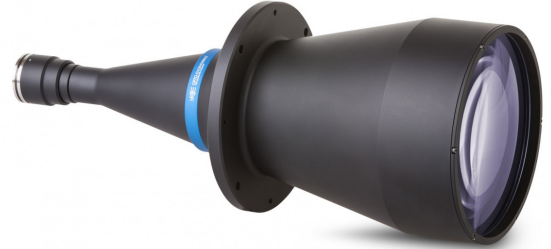

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only.



CMHO series

Clamping mechanics

---

**CMHO240R** Clamping mechanics rotation for TCxx240 lenses and LTCLHP240-X illuminators rotation type

---



mvBlueFOX3-2 series

USB3 vision camera with Sony Pregius CMOS sensors

---

**RT-mvBF3-2024a** USB3 Vision camera with Sony Pregius CMOS sensor IMX249

---

**RT-mvBF3-2024** USB3 Vision camera with Sony Pregius CMOS sensor IMX174

---

**RT-mvBF3-2089a** USB3 Vision camera with Sony Pregius CMOS sensor IMX267

---

**RT-mvBF3-2089** USB3 Vision camera with Sony Pregius CMOS sensor IMX255



mvBlueCOUGAR series

GigE & Dual GigE Vision cameras

---

---

**RT-mvBC-X104f** Camera with interface GigE (1GB/s), sensor size 1/1.2", mpixel 2.35, resolution 1936 x 1216, sensor name IMX249, sensor type CMOS

---

**RT-mvBC-XD104d** Camera with interface Dual GigE (2GB/s), sensor size 1/1.2", mpixel 2.35, resolution 1936 x 1214, sensor name IMX174, sensor type CMOS

---

**RT-mvBC-X109b** Camera with interface GigE (1GB/s), sensor size 1", mpixel 8.95, resolution 4112 x 2176, sensor name IMX267, sensor type CMOS

---

**RT-mvBC-XD109b** Camera with interface Dual GigE (2GB/s), sensor size 1", mpixel 8.95, resolution 4112 X 2176, sensor name IMX267, sensor type CMOS



COE HR AS-X series

20MP, 26MP and 29MP area scan cameras for high-speed applications

---

**COE-200-M-POE-070-IR-C** HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Gray, GigE, 6 fps, POE, C - mount, Glass filter

---

**COE-200-C-POE-070-IR-C** HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Color, GigE, 6 fps, POE, C - mount, Infrared cut filter

---

**COE-200-M-USB-070-IR-C** HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Gray, 14 fps, C - mount, Glass filter

---

**COE-200-C-USB-070-IR-C** HR Area Scan camera IMX183, CMOS, Rolling shutter, 5472 × 3648, 20.4 MP, 2.4 pix, 1", Color, 14 fps, C - mount, Infrared cut filter

---