
SCALE 1:1

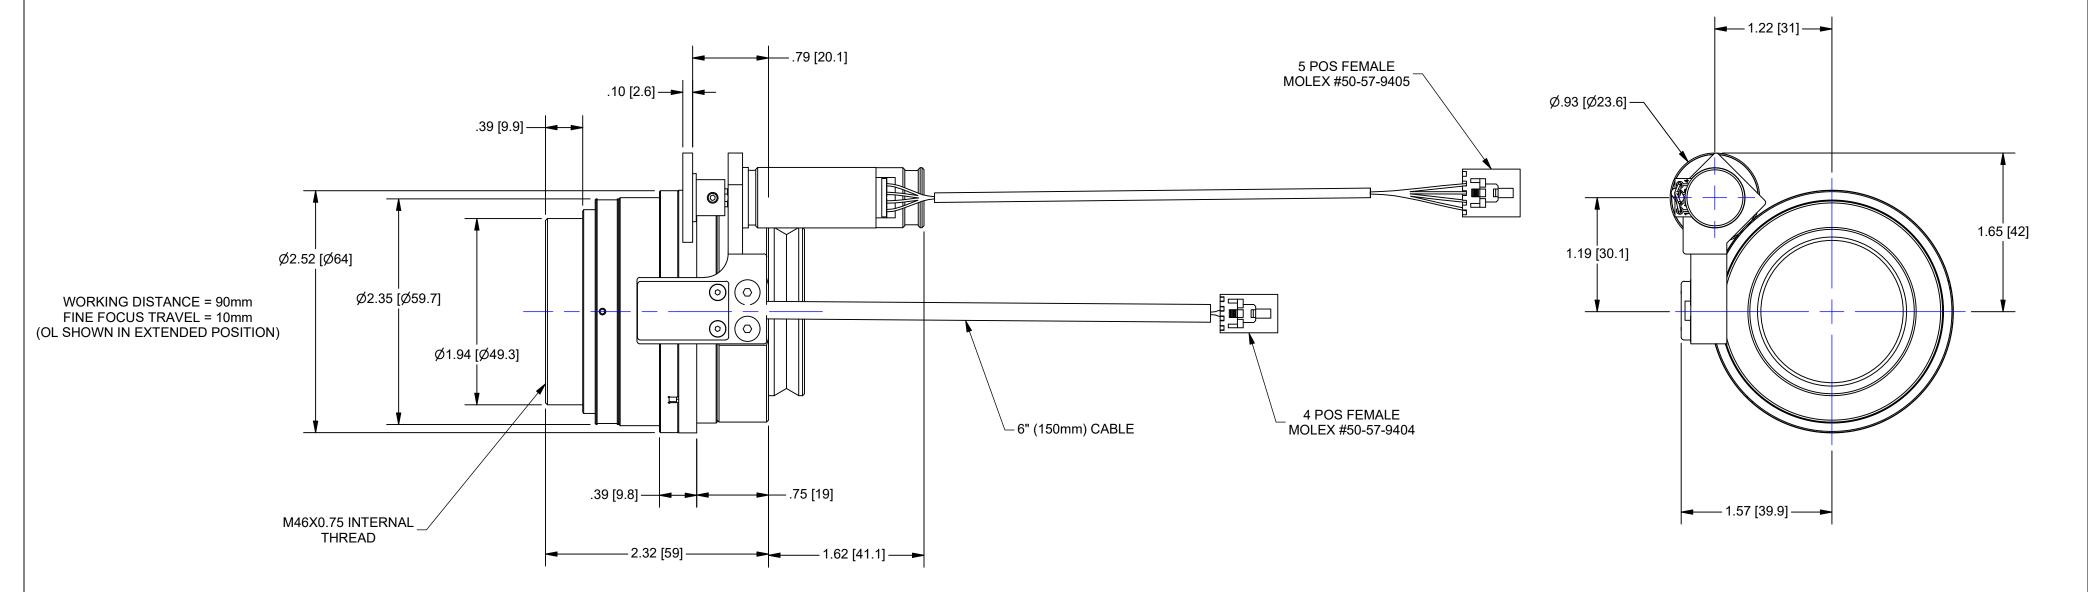

2φ MOTOR AND HALL EFFECT CABLE INFORMATION:

FOCUS / HE CABLE LENGTH = 0.15m
 USE NAVITAR #1-40281 (1.8m), 1-40282 (1.2m), 1-40283 (0.6m) TO CONNECT TO NAVITAR 2φ CONTROLLERS (1-40241,1-40233, 1-40234)

FF MOTOR 5 POSITION FEMALE CONNECTOR (MOLEX #50-57-9405) HE SENSOR 4 POSITION FEMALE CONNECTOR (MOLEX #50-57-9404)

2φ FF MOTOR PINOUT
PIN 1 = MOTOR A+ (GREEN)
PIN 2 = MOTOR A- (RED)
PIN 3 = MOTOR B+ (BLACK)
PIN 4 = MOTOR B- (WHITE)
PIN 5 = N/C

PIN 1 = COMMON
PIN 2 = FAR LIMIT
PIN 3 = +5vDC
PIN 4 = NEAR LIMIT

OUTLINE

		00.2
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART	
SCALE: 2:1	OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.	ROCHESTER, NEW YORK
WEIGHT: 0.90 lbmass	0.0 inch 1.0	
DR BY: BONAFEDE		MTR FF, 2Φ, 1.0X LENS ATTACHMEN
CH BY: J. WILLIAMSON	0.0 mm 25.0	
PROJECT#: E3506	DO NOT SCALE DRAWING	SIZE PART NUMBER REV
DATE DR: 9/19/2017	\bigoplus	C 1-81204M2 A
		·